arXiv:1210.2845v1 [quant-ph] 10 Oct 2012

Structure of minimum-error quantum state discrimination

Joonwoo Bae *

Center for Quantum Technologies, National University of Singapore, Singapore 117543,
ICFO–Institut de Ciències Fotòniques, 08860 Castelldefels (Barcelona), Spain.

October 11, 2012

Abstract

Distinguishing different quantum states is a fundamental task having practical applications in information processing with quantum systems, while solutions to the task are generally lacked. We here consider the case that errors are attempted to be minimized when distinguishing quantum states, and show its general properties useful to derive solutions in the minimum-error discrimination.

We show that, for a set of quantum states to discriminate among, there exists a single positive operator, which we call a symmetry operator, that completely characterizes optimal parameters in minimum-error state discrimination, such as optimal measurement and minimal errors. Using symmetry operators, we introduce equivalent classes among sets of quantum states: those sets in the same class are defined as they share an identical symmetry operator, meaning that their optimal discrimination is already characterized. In the other way around, from a given symmetry operator, we provide a systematic way of constructing a set of quantum states for which optimal discrimination can be found by the operator. We then provide a geometric formulation for solving minimum-error state discrimination, exploiting the underlying geometry of given quantum states. All these obtained general properties are then illustrated with qubit states and solutions to various cases of multiple qubit states are obtained. We explicitly show how to find optimal measurement and a symmetry operator for a given set of qubit states.

On the fundamental aspects, the followings are shown. First, we show that, when ensemble steering is applied with shared entanglement, steerability of quantum states in the ensemble is proportional to the success probability in state discrimination under the no-signaling condition. We also show equivalent expressions of the success probability, according to different approaches of solving state discrimination. Finally, we observe a distinguished feature of an asymptotic quantum cloning as state discrimination: relations of given quantum states conditionally play a role in quantum cloning, depending on whether quantum cloning is non-asymptotic or asymptotic.

---

*E-mail: bae.joonwoo@gmail.com

1 Introduction

In the early days when applying quantum systems to communication between distant parties, in particular photonic systems as they define physical limits to sources in optical communication, there have been pioneering works which investigate how quantum systems can be applied to information processing and incorporated to frameworks of classical information theory [1] [2] [3]. One of the most fundamental tasks in doing so, as well as of a basis for further applications, is to quantify classical messages that can be extracted from given quantum states. According to different purposes, different designs of measurements have been introduced and studied, for instance, measurement settings are optimized for accessible information [4], unambiguous discrimination [5] [6] [7] [8] [9], maximizing confidence to guess about certain states [10], or minimizing errors on average when making guesses about given states [1] [2] [3], etc. Recently, there have also been approaches that, with pre-determined rate of inconclusive results, errors in discrimination are minimized [11] [12]. All these are fundamental and practical in quantum information theory and its applications, and also a useful tool to investigate foundational aspects of quantum theory, see also reviews in Refs. [13] [14] [15] [16] [17].

Among different strategies in quantum state discrimination, we are here interested in the minimum-error discrimination where the error when guessing about given states is to be minimized on average. This also has a fundamental interest since the ultimate quantum limit of guessing in which state a quantum system has been prepared among a specified set of states is characterized. The main goal would be, for arbitrarily given sets of quantum states, to explicitly provide a general method of finding optimal measurement that achieves minimal errors on average in the state discrimination. To this end, we here investigate general structures of the minimum-error state discrimination in various aspects. While the problem itself is of an optimization task over measurement, we here consider it from different approaches: operational meaning, equivalent expressions, equivalence classes in terms of optimal discrimination, geometric method of solving state discrimination, connections to other physical principles, etc. Related issues are the asymptotic behavior or convergence of minimal errors when copies of given states tend to be very large, that is, quantum Chernoff bound [18] [19] [20] [21].

In the present work, we make a unique approach to the problem of minimum-error state discrimination as the so-called complementarity problem in the context of convex optimization, see e.g. Ref. [41]. The approach refers to a direct analysis over optimality conditions: in fact more parameters are considered in this way than originally given problems, however, the advantage lies at the fact that the generic structure of given optimization problems is exploited. Applying the method of complementarity problem, we provide a geometric formulation of minimum-error state discrimination, which can be exploited to any problems of minimum-error state discrimination once the underlying geometry of given states is clear. Remarkably, as a consequence, we show that it is possible to derive analytic solutions in minimum-error discrimination of quantum states among which no symmetry may exist.

1.1 Relevance of minimum-error quantum state discrimination

Let us briefly describe how the problem of minimum-error state discrimination is characterized, relevant and related with other works in quantum information tasks. First of all, among different figures of merits in state discrimination, one of its distinguished features is that performance of measurement devices is not immediately specified but to be optimized to have minimal errors. This can be compared with the other extremal case, unambiguous state discrimination, where measurement devices are immediately designed such that they never make an erroneous conclusion. In this sense, results of minimum-error discrimination show the ultimate limit in the perception process, over all possible and physical measurement, to learn about in which quantum state a system is prepared. In fact, this fundamental relevance is connected to other ultimate limitations of quantum information processing when they are concerned about distinguishability of quantum states. In particular, the connections to other fundamental no-go theorems in quantum theory are shown: measurement-based state manipulations, i.e. state estimation or discrimination, are the worst processing of (approximately) copying quantum states [22] [23] [24] [25], and the most efficient way of guessing the preparation of quantum states among finite number of choice within the non-signaling framework [26] [27] [28].

The relations among the no-signaling principle, quantum cloning, and quantum state discrimination are as follows. First, it is shown in Ref. [29] that quantum cloning can be determined by the no-signaling principle. Here, the no-signaling condition refers to the relativistic causality, that information cannot be sent faster than the speed of light. That is to say, as instantaneous communication is excluded, cloning of quantum states better than what can be achieved by legitimate quantum operations is also prevented.

Then, it turns out that, for cases of symmetric cloning of universal and phase-covariant quantum states [22] [23] [24], when the number of output clones tends to be very large i.e. the asymptotic limit, the efficiency of optimal quantum cloning converges to that of measurement-based strategies such as state or phase estimation. This implies that, optimal measurement-based strategies for quantum cloning, by which infinite clones are produced, cannot be distinguished from any other optimal quantum cloning operations that produce infinite number of clones. This also has connections to the fact that quantum cloning is generally related to distinguishability of quantum states: distinguishability should not increase with clones produced, or in other words, quantum cloning must be limited such that distinguishability of states does not increase. Then, the general connection has been conjectured, whether quantum cloning of any set of quantum states converges to state estimation in the asymptotic limit, or not [30]. In Ref. [25], it is then shown that quantum cloning has to be necessarily a measurement-based strategy in the asymptotic limit. For instance, when quantum states to be cloned are not specified i.e. universal cloning, the optimal cloning to produce infinite clones corresponds to estimation of given states. Or, if they are specified by a set of finite states, then optimal cloning corresponds to quantum state discrimination.

From the above, it follows that in a way, quantum state estimation or discrimination must be related to the no-signaling principle, at least via the relations with quantum cloning. Discrimination of two pure qubit states is shown to be tightly related to the no-signaling principle [26]. Its generalization to mixed states is also obtained [27], which is nevertheless the case that quantum states considered contain classical noise. Finally, in Ref. [28], the general connection is completely shown together with the underlying mathematical structure and physical principles such as ensemble steering: for any chosen set of quantum states, better distinguishability of quantum states than what can be dictated by quantum postulates would directly lead to a contradiction to the no-signaling principle. The tight relation shows that state discrimination is determined not only by optimization over quantum measurements but also as a consequence of other physical principles in a deeper level. This also means that, for measurements aimed to distinguish quantum states, the no-signaling principle can be exploited as one of physical assumptions on measurement devices while relaxing the measurement postulate.

1.2 Review of known results

Coming back to the problem itself, despite of the importance and interest in its own right as well as connections to other fundamental and practical problems, solutions to minimum-error discrimination are generally lacked. Once an arbitrary set of quantum states are given, no method has been shown to generally provide analytic solutions. A general method shown so far that can be applied to arbitrary set of quantum states is based on numerical algorithms, which is in fact efficient taking a polynomial time in its cost [38] [36] [39] [40], and only *approximate values* to optimal solutions are provided.

Known analytic results can be classified into two cases, depending on whether or not given states contain certain symmetries. In fact, two-state discrimination is the only case that the solution is known when given two states do not show any structure between them. The solution in this case was derived in 1976 and is known as the Helstrom bound [3]. Apart from this, no analytic solution for optimal discrimination has been shown if given states do not contain symmetries. For instance, *in the next simplest case that arbitrary three states are given, or even simpler case of arbitrary three qubit states*, there is no explicit method that gives how to find the minimal error and to construct optimal measurement in an analytic way. Solutions are known for some cases when given quantum states have certain symmetries, for instance, the geometrically uniform structure, see Refs. [3] [4] [31] [32] [33] [34] [35] [36] [37].

Although general solutions are lacked, the necessary and sufficient conditions that characterize optimal discrimination have been obtained in the very beginning when the problem was introduced [1] [2]. That is, parameters giving optimal discrimination satisfy the conditions, and conversely, any parameters fulfilling the conditions can construct optimal discrimination. They have been used to run a numerical algorithm [38].

1.3 Contribution and summary of the results

The results of the present work can be summarized as follows. We show that for any set of quantum states to discriminate among, there exists a single positive operator, what we call *symmetry operator*, that completely characterizes optimal discrimination such as optimal measurement and minimal errors. A symmetry operator also finds an interpretation of the maximal success probability in state discrimination as the averaged trace distance between given states and the symmetry operator. This is also in accordance with distinguishability of classical probabilistic systems. We then exploit the existence and the properties of a symmetry operator, to derive general results in minimum-error state discrimination. First, we construct equivalence classes among sets of quantum states using symmetry operators, using the fact that a symmetry operator gives a complete characterization about optimal discrimination. This can also be an alternative approach to solve state discrimination: by checking whether two sets of quantum states share the same symmetry operator or not, one reduce the cost to pay to find optimal discrimination. Conversely, when a symmetry operator is given, we show how one can systematically construct a problem of minimum-error discrimination for which optimal discrimination is already known from the symmetry operator. In fact, by a single symmetry operator, infinitely many number of sets of quantum states can be generated such that optimal discrimination of all of them corresponds to the symmetry operator.

Then, analyzing the symmetry operator and optimality conditions, we derive a *geometric formulation of minimum-error quantum state discrimination*, in which optimal discrimination can be solved by finding congruent polytopes in underlying state spaces. The advantage of the method is that it can generally be applied and robust to a little modification of some of given quantum states. For instance, using the method, one can easily solve optimal discrimination of arbitrarily given qubit states which contain no symmetry among them. This is a remarkable progress along the line of minimum-error state discrimination.

We also review and address tight relations that optimal discrimination of quantum states has with other physical conditions, such as ensemble steering and the relativistic causality. From this, we show various expressions of the maximal success probability according to different approaches of solving state discrimination. We also derive how the no-signaling condition characterizes optimality conditions for the state discrimination. In this way, different operational meanings can be found.

To illustrate all these results, we consider cases of qubit states, where the state geometry is clear. We explicitly provide a systematic way of obtaining optimal discrimination among arbitrarily given qubit states, that may contain no symmetries among them. In particular, when qubit states are given with equal prior probabilities, optimal discrimination is derived in a much simpler way from the geometric formulation.

Finally, we consider results obtained in state discrimination in the context of its equivalence to asymptotic quantum cloning. In quantum cloning, the quality of output clones generally depends on relations of given states such as angles between them. We, however, observe that in the asymptotic limit, i.e. asymptotic cloning or equivalently discrimination of them, the cloning quality is independent to their relation. That is, even if given quantum states are modified, the cloning fidelity remains the same. This shows a sharp and qualitative difference between non-asymptotic and asymptotic quantum cloning in their connections to relations among quantum states: *relations among quantum states conditionally play a role in quantum cloning, depending on whether given quantum states after cloning are broadcasted to all parties or not.*

The rest of the paper is structured as follows. In Sec. 2, we begin with the problem definition and introduction to the minimum-error state discrimination. Different forms of optimality conditions and analysis on them are provided. Based on these, the geometric formulation is also shown. In Sec. 3, we present general properties in minimum-error quantum state discrimination, based on the existence of a symmetry operator: equivalence classes, construction of state-discrimination problems, and analytic expressions of the guessing probability. In Sec. 4, we apply all these to cases of qubit states and derive explicitly optimal discrimination. It is shown that almost all qubit state discrimination problems are solved exploiting the geometric formulation. In Sec. 5, we argue that known solutions in optimal discrimination for high-dimensional quantum states can be applied to finding the underlying geometry of high-dimensional quantum states. In Sec. 6, we discuss the connection between quantum cloning and state discrimination. We show a remarkable observation that relations among quantum states may play a role generally in non-asymptotic quantum cloning, and the dependence on such relations in the cloning fidelity can be completely washed away only in the asymptotic cases. In Sec. 7, we conclude the results.

2 Minimum-error discrimination and optimality conditions

We first introduce the problem of minimum-error quantum state discrimination and fix notations. We review the optimality conditions which completely characterize optimal parameters for minimum-error state discrimination. We show different expressions of the optimality conditions, and provide a geometric interpretation of them.

2.1 Problem definition and probability-theoretic preliminaries

Suppose that there is a device that prepares quantum systems in different states. The preparation device has N buttons, and pressing one of them, say x, corresponds to an instance that a state ρ_{x} is generated. Denoted by q_{x} as the probability that the button x is pressed, *a priori* probability that ρ_{x} is produced from the device is defined. We write this state generation by $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$. Once generated, a state is then sent to a measurement device, which is prepared to make a best guess about which button has been pressed in the preparation. This corresponds to the task of distinguishing N quantum states via measurement devices.

Let $P(\mathrm{x}|\mathrm{y})$ denote the probability that when state ρ_{y} has been prepared, one concludes from measurement outcomes that state ρ_{x} is given. Or, equivalently as the conclusion follows from measurement outcomes, it is the probability that an output port x is clicked in the measurement when a button y is pressed in the preparation. The figure of merit that we consider is to make errors with a minimum probability on average, or equivalently to have maximal probability to make correct guesses about input states, called *the guessing probability*, $\mathrm{P}_{\mathrm{guess}} = \max_{M} \sum_{\mathrm{x}} q_{\mathrm{x}} P(\mathrm{x}|\mathrm{x})$ where the maximization runs over measurement settings M.

Measurement on quantum systems is described by Positive-Operator-Valued-Measures (POVMs): a set of positive operators $\{M_{\mathrm{x}} \geq 0\}_{\mathrm{x}=1}^{N}$ that fulfills, $\sum_{\mathrm{x}=1}^{N} M_{\mathrm{x}} = I$. For given states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$, let $\{M_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ denote POVMs for quantum state discrimination. When state ρ_{y} is actually given, the probability that a detection event happens in measurement M_{x} is given by $\mathrm{P}(\mathrm{x}|\mathrm{y}) = \mathrm{tr}[\rho_{\mathrm{y}} M_{\mathrm{x}}]$. The guessing probability can therefore be written as

$$\mathrm{P}_{\mathrm{guess}} = \max_{M} \sum_{\mathrm{x}=1}^{N} q_{\mathrm{x}} P(\mathrm{x}|\mathrm{x}) = \max_{\{M_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}} \sum_{\mathrm{x}=1}^{N} q_{\mathrm{x}} \mathrm{tr}[M_{\mathrm{x}} \rho_{\mathrm{x}}], \tag{1}$$

with the maximization over all POVMs. From postulates of quantum theory, non-orthogonal quantum states cannot be perfect discriminated, i.e. $P_{\mathrm{guess}} < 1$.

The description of quantum state discrimination above can be rephrased in a probability-theoretic way as follows. The preparation applies random variable X, which corresponds to a button pressed, and the measurement shows the other random variable Y for the guessing with some probabilities. Distinguishability of different probabilistic systems can be in general measured by variational distance between probabilities. Then, the distance from the uniform distribution is particularly useful to describe and interpret the guessing probability. The distance of a probability distribution of random variable P_X from the uniform distribution, which is $1/N$ in this case, is denoted by $d(P_X)$ or simply $d(X)$ and defined as

$$d(X) = \frac{1}{2} \sum_{\mathrm{x}=1}^{N} |P_X(\mathrm{x}) - \frac{1}{N}|. \tag{2}$$

Let $d(X|Y)$ denote the distance of random variable X given Y from the uniform.

Lemma 2.1. *[42] The guessing probability about X given Y can be expressed by*

$$P_{\mathrm{guess}} := P_{\mathrm{guess}}(X|Y) = \frac{1}{N} + d(X|Y). \tag{3}$$

Proof. Note that the guessing probability is, $P_{\mathrm{guess}} = \sum_{\mathrm{y}=1}^{N} P_Y(\mathrm{y}) P_{X|Y}(\mathrm{y}|\mathrm{y})$. It is then straightforward to write the distance, as follows,

$$\begin{aligned} d(X|Y) &= \sum_{\mathrm{y}=1} P_Y(\mathrm{y}) d(X|Y=\mathrm{y}) \\ &= \frac{1}{2} \sum_{\mathrm{y}=1}^{N} P_Y(\mathrm{y}) \sum_{\mathrm{x}=1}^{N} |P_{X|Y}(\mathrm{x}|\mathrm{y}) - \frac{1}{N}|. \end{aligned}$$

As a probability of making correct guesses is not smaller than the random guess, we can assume that $P_{X|Y}(\mathrm{y}|\mathrm{y}) \geq 1/N$ for all $\mathrm{y} = 1, \cdots, N$ and $P_{X|Y}(\mathrm{x}|\mathrm{y}) \leq 1/N$ for $\mathrm{x} \neq \mathrm{y}$, and this does not lose any generality. Thus, it follows that, when $Y = \mathrm{y}$,

$$\begin{aligned} \sum_{\mathrm{x}=1}^{N} |P_{X|Y}(\mathrm{x}|\mathrm{y}) - \frac{1}{N}| &= P_{X|Y}(\mathrm{y}|\mathrm{y}) - \frac{1}{N} - \sum_{\mathrm{x}\neq\mathrm{y}} (P_{X|Y}(\mathrm{x}|\mathrm{y}) - \frac{1}{N}) \\ &= 2P_{X|Y}(\mathrm{y}|\mathrm{y}) - \frac{2}{N} \end{aligned}$$

From these two relations, it holds that,

$$d(X|Y) = P_{\mathrm{guess}} - \sum_{\mathrm{y}=1}^{N} P_Y(\mathrm{y}) \frac{1}{N} = P_{\mathrm{guess}} - \frac{1}{N}$$

and thus Eq. (3) is shown. □

This shows that the guessing probability about random variable X given Y corresponds to the distance of the probability $P_{X|Y}$ being deviated from the uniform distribution. As only input and output random variables are taken into account, the expression in Eq. (3) generally works for any physical systems employed from preparation to measurement. Then, the distance $d(X|Y)$ depends on physical systems employed between preparation and measurement. If states of quantum systems are applied, the distance $d(X|Y)$ must be expressed in terms of properties or relations of given quantum states. We will come to the expression for quantum systems in Lemma 3.6.

2.2 Optimality conditions

As it is shown in Eq. (1), optimal discrimination is obtained with POVM elements that maximize the probability of making correct guesses. There have been different approaches to characterize optimal measurement. Here, we review known results and show that they are equivalent one another.

Optimality conditions from analytic derivation

First, the necessary and sufficient conditions that POVMs must satisfy to fulfill optimal discrimination are obtained in the very beginning when the problem was introduced in Refs. [1] [2]. For given states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ to discriminate among, POVM elements $\{M_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ achieve the guessing probability if and only if they satisfy

$$\begin{aligned} M_{\mathrm{x}}(q_{\mathrm{x}}\rho_{\mathrm{x}} - q_{\mathrm{y}}\rho_{\mathrm{y}})M_{\mathrm{y}} &= 0, \quad \forall \mathrm{x},\mathrm{y} = 1, \cdots, N & (4) \\ \sum_{\mathrm{x}=1}^{N} q_{\mathrm{x}}\rho_{\mathrm{x}}M_{\mathrm{x}} - q_{\mathrm{y}}\rho_{\mathrm{y}} &\geq 0, \quad \forall \mathrm{y} = 1, \cdots, N. & (5) \end{aligned}$$

That is, for a state discrimination problem, if one finds a set of POVMs that satisfy two conditions above, then optimal discrimination is immediately obtained. Note also that for a given problem of state discrimination, optimal measurement is generally not unique.

Optimality condition from convex optimization

The optimality conditions can also be derived from a different context, the formalism of convex optimization [40]. The optimization problem in Eq. (1) with the convex and affine constraints on POVMs can be written as,

$$\begin{aligned} \max \quad & \sum_{\mathrm{x}=1}^{N} q_{\mathrm{x}} \mathrm{tr}[M_{\mathrm{x}} \rho_{\mathrm{x}}] \\ \text{subject to} \quad & \sum_{\mathrm{x}=1}^{N} M_{\mathrm{x}} = I, \text{ and } M_{\mathrm{x}} \geq 0, \ \forall \ \mathrm{x} = 1, \cdots, N. \end{aligned} \tag{6}$$

A problem dual to the above, called dual problem, can be derived as follows,

$$\begin{aligned} \min \quad & \mathrm{tr}[K] \\ \text{subject to} \quad & K \geq q_{\mathrm{x}} \rho_{\mathrm{x}}, \ \forall \ \mathrm{x} = 1, \cdots, N. \end{aligned} \tag{7}$$

Putting optimal discrimination problems into this convex optimization framework, the solution i.e. the guessing probability is returned efficiently in a polynomial time. In general, solutions from primal and dual problems in the convex optimization are not the same. It generally holds that either of solutions is larger than or equal to the other, from the property called weak duality. In this problem of state discrimination, it turns out that solutions from both problems coincide each other, which follows from so-called constraint quantification methods in the optimization. This property is called the strong duality. Thus, the guessing probability is obtained from either primal or dual problem.

A third approach to the convex optimization, that we are mainly to consider here, is the so-called *complementarity problem* which directly analyze constraints that characterize optimal parameters in both primal and dual problems [43]. As both of primal and dual parameters are taken into account, the approach itself is not considered to be more efficient in numerics than primal or dual problems. Its advantage lies at the fact that general structure existing in an optimization problem are fully exploited. Those constraints which characterize optimal solutions are called optimality conditions, and can be written as the so-called Karush-Kuhn-Tucker (KKT) conditions. In general, KKT conditions are only necessary since solutions of primal and dual problems can be unequal. As we have mentioned, from the constraint qualification the strong duality holds, and consequently KKT conditions in this case are also sufficient. The list of KKT conditions for the discrimination problem is, then, constraints in Eqs. (6) and (7) and two more conditions in the following.

Lemma 2.2. *(Optimality conditions)*
For a set of states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$*, the optimal discrimination defines a symmetry operator* K *and complementary states* $\{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$*, where* $r_{\mathrm{x}} \geq 0$*, such that they are related as follows, for* $\mathrm{x} = 1, \cdots, N$*,*

$$\begin{aligned} \text{(symmetry operator)} \qquad K &= q_{\mathrm{x}} \rho_{\mathrm{x}} + r_{\mathrm{x}} \sigma_{\mathrm{x}}, && (8) \\ \text{(orthogonality)} \quad r_{\mathrm{x}} \mathrm{tr}[M_{\mathrm{x}} \sigma_{\mathrm{x}}] &= 0, && (9) \end{aligned}$$

where POVM elements $\{M_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ *satisfying above are optimal measurement. Note that the symmetry operator* K *is equal to the operator to be minimized in Eq. (7) in the dual problem, and thus the guessing probability is given by the symmetry operator,* $P_{\text{guess}} = \mathrm{tr}[K]$*. These are equivalent to the optimality conditions shown in Eqs. (4) and (5).*

In the context of convex optimization, the condition of symmetry operator in Eq. (8) follows from the Lagrangian stability and the orthogonality condition in Eq. (9) from the complementary slackness [40]. In state discrimination, therefore, those parameters satisfying KKT conditions, Eqs. (6), (7), (8) and (9) are characterized as optimal measurements and complementary states to give guessing probabilities. Compared to previously known conditions in Eqs. (4) and (5), the usefulness of KKT conditions is that conditions about states (in the state space) and optimal measurement are separated. From this, their meanings can be found exploiting the quantum state geometry. These are later to be exploited to formalize a geometric approach to optimal state discrimination. In the following, we show that optimality conditions in Eqs. (8) and (9) are equivalent to those in Eqs. (4) and (5).

Proof of the equivalence. Suppose that for a set of states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$, optimal discrimination is performed by POVM elements $\{M_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$. It suffices to show that KKT conditions imply Eqs. (4) and (5). Note that the symmetry operator K can be written as it is shown in Eq. (8), and also $K = \sum_{\mathrm{x}=1}^{N} q_{\mathrm{x}} \rho_{x} M_{\mathrm{x}}$ (with optimal measurement) since the following holds in the dual problem in Eq. (7)

$$P_{\mathrm{guess}} = \mathrm{tr}[K] = \mathrm{tr}[\sum_{\mathrm{x}=1}^{N} q_{\mathrm{x}} \rho_{\mathrm{x}} M_{\mathrm{x}}]. \tag{10}$$

In Eq. (8), since $r_{\mathrm{x}} \sigma_{\mathrm{x}} \geq 0$, it follows that $K - q_{\mathrm{x}} \rho_{\mathrm{x}} \geq 0$ for all $\mathrm{x} = 1, \cdots, N$. Thus, the condition in Eq. (5) is shown.

Next, Eq. (10) also implies that $\mathrm{tr}[M_{\mathrm{x}} r_{\mathrm{x}} \sigma_{\mathrm{x}}] = 0$ for each x. Moreover, since $\sigma_{\mathrm{x}} \geq 0$ and $M_{\mathrm{x}} \geq 0$ as well as $r_{\mathrm{x}} \geq 0$, this is equal to, $M_{\mathrm{x}} r_{\mathrm{x}} \sigma_{\mathrm{x}} = 0$ for each x. Using the relation in Eq. (8), we have

$$M_{\mathrm{x}}(q_{\mathrm{x}} \rho_{\mathrm{x}} - q_{\mathrm{y}} \rho_{\mathrm{y}}) M_{\mathrm{y}} = M_{\mathrm{x}}(r_{\mathrm{y}} \sigma_{\mathrm{y}} M_{\mathrm{y}}) - (M_{\mathrm{x}} r_{\mathrm{x}} \sigma_{\mathrm{x}}) M_{\mathrm{y}} = 0.$$

Thus, it is shown that the condition in Eq. (4) holds from KKT conditions. □

Optimality condition from fundamental principles

In Ref. [28], it is shown that the no-signaling principle can generally determine the minimum-error quantum state discrimination. That is, if measurement devices at a location work better in state discrimination than what is characterized within quantum theory, they can be used for a faster-than-light communication. Here, we briefly sketch the main framework of the derivation and show the optimality conditions derived from the no-signaling condition.

To derive the tight relation, we also need a property of quantum states, called *ensemble steering*: one can always find a bipartite quantum state such that sharing the state, one party can prepare any ensemble decomposition of the other party's state. This was firstly asserted by Schrödinger [44] and later formalized as Gisin-Hughston-Jozsa-Wootters (GHJW) theorem [45] [46]. To be precise, the tight relation can be explained as follows: optimal quantum state discrimination is a consequence that two correlations are compromised, i) one from quantum correlations, called ensemble steering, that ensemble decompositions of quantum states can be steered by a party at a distance, and ii) the other, the no-signaling condition on probability distributions, that probability distributions of input and output random variables at a location cannot be exploited to instantaneous communication.

Now, we show that optimality conditions in Eqs. (8) and (9) can also be reproduced by the two fundamental constraints. The optimality conditions in this case are expressed such that performance of input-output relations of measurement devices is characterized for state discrimination. Suppose that the preparation of quantum states to discriminate among is now done by ensemble steering by a party at a distance, while consuming shared entanglement. Then, in this way, any ensemble decompositions can be prepared to the measurement device: for states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ of interest, suppose that ensembles right before measurement are given by

$$\rho = p_{\mathrm{x}}\rho_{\mathrm{x}} + (1 - p_{\mathrm{x}})\sigma_{\mathrm{x}}, \text{ for } \mathrm{x} = 1, \cdots, N \tag{11}$$

for some states $\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ with $q_{\mathrm{x}} = p_{\mathrm{x}} / \sum_{\mathrm{y}=1}^{N} p_{\mathrm{y}}$. Notice that an identical ensemble ρ has various decompositions according to indices $\mathrm{x} =, 1 \cdots, N,$. Existence of states $\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ that compose the identical ensemble in the above together with a given set $\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ follows from the GHJW theorem in Refs. [45] [46]. The relation between two probabilities $\{q_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ and $\{p_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ is to be explained in the below. Note that $\{q_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ are prior probabilities and thus $\sum_{\mathrm{x}=1}^{N} q_{\mathrm{x}} = 1$, and that $\{p_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ are *probabilities to steer* quantum states $\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ in the ensembles and thus $\sum_{\mathrm{x}=1}^{N} p_{\mathrm{x}} \geq 1$.

If a measurement device is set only to discriminate among states $\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$, the capability of optimal discrimination of $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ cannot work with an arbitrarily high probability. A simple argument that leads to violation of the no-signaling principle in doing so can be derived from the strategy that the ensemble decomposition is concluded from discrimination of states $\{\rho_{x}\}_{\mathrm{x}=1}^{N}$: that is, concluding that ρ_{x} is found from the discrimination, one guesses that the ensemble is therefore prepared as $p_{\mathrm{x}}\rho_{\mathrm{x}} + (1-p_{\mathrm{x}})\sigma_{\mathrm{x}}$ and the preparation is concluded as the steering corresponding to alphabet x. While no information is announced about the preparation of ensemble decompositions among $\mathrm{x} = 1, \cdots, N$, discrimination of quantum states $\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ from measurement devices should not allow one to gain knowledge about the preparation. Without any information about the preparation, it must be a random guess about ensemble decompositions. Thus, state discrimination can be constrained such that the strategy above gives at its best the random guess.

Based on the constraints discussed so far with ensembles in Eq. (11), conditions to probabilities for optimal state discrimination are explicitly derived: by the no-signaling condition, the following holds for any measurement devices [28],

$$\sum_{\mathrm{x}=1}^{N} p_{\mathrm{x}} P(\mathrm{x}|\mathrm{x}, \{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}) \leq 1, \tag{12}$$

where $P(\mathrm{x}|\mathrm{x}, \{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ is the probability distribution when quantum systems to be detected are in states $\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$. The equality holds if and only if, for cases that an ensemble is prepared as shown in Eq. (11) with some x, a measurement device responds only to quantum systems of state ρ_{x} but not to state σ_{x}, that is, $P(\mathrm{x}|\mathrm{x},\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})=0$. Note that, with the measurement postulate, this is equivalent to the optimality condition in Eq. (9). The bound in Eq. (12) constrains optimal discrimination among quantum states $\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ that are given with prior probabilities $\{q_{\mathrm{x}}=p_{\mathrm{x}}/\sum_{\mathrm{y}=1}^{N}p_{\mathrm{y}}\}_{\mathrm{x}=1}^{N}$. All these are summarized as follows.

Lemma 2.3. *When quantum states $\{q_{\mathrm{x}},\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ are prepared as it is shown in Eq. (11) by ensemble steering by a distant part, the guessing probability is bounded upper by the no-signaling condition,*

$$P_{\mathrm{guess}}\leq\frac{1}{\sum_{\mathrm{x}=1}^{N}p_{\mathrm{x}}},\ \text{with equality if and only if}\ P(\mathrm{x}|\mathrm{x},\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})=0,\ \text{for}\ \mathrm{x}=1,\cdots,N,\quad(13)$$

where $\{p_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ are from Eq. (11). With the measurement postulate, the equality holds when POVM M_{x} does not respond to σ_{x} but only to ρ_{x} for each x*, that is,*

$$\mathrm{tr}[M_{\mathrm{x}}\sigma_{x}]=0\qquad(14)$$

which reproduces the condition in Eq. (9). Then, the upper bound is equal to the guessing probability from quantum theory, e.g. Eq. (7).

Proof. The upper bound can be derived from Eq. (12). We also recall $q_{\mathrm{x}}=p_{\mathrm{x}}/\sum_{\mathrm{y}=1}^{N}$. Since $\sum_{\mathrm{x}=1}^{N}q_{\mathrm{x}}=1$, the upper bound in Eq. (13) is obtained. □

Consequently, two constraints in Eqs. (11) and (14) are optimality conditions for probabilities in minimum-error state discrimination, assuming the measurement postulate. Optimality conditions in Eqs. (11) and (14) are equivalent to those in Lemma 2.2: Eq. (11) is equivalent to the symmetry operator in Eq. (8). We also remark that this approach of constraining with the no-signaling principle is valid for generalized probability theories, as long as the steering effect is allowed to do, i.e. such that different decompositions of an identical ensemble in Eq. (11) can be prepared at a distance.

2.3 Geometric formulation

To solve minimum-error quantum state discrimination, the optimality conditions in Lemma 2.2 are particularly useful since conditions for states and measurements are separated, respectively. An interesting observation is that optimal discrimination of quantum states, which is supposed to be explained on the level of probability distributions from measurement outcomes, can be explained only with quantum states through the condition in Eq. (8). In what follows, we show how minimum-error quantum state discrimination can be formalized exploiting the quantum state geometry.

From the optimality conditions in Lemma 2.2, for minimum-error discrimination of quantum states, there exists a symmetry operator K which characterizes optimal discrimination and directly gives the guessing probability. Once the operator is obtained, the rest is straightforward. First, complementary states $\{r_{\mathrm{x}},\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ can be found as $K-q_{\mathrm{x}}\rho_{\mathrm{x}}$ from Eq. (8). Clearly, this shows the uniqueness of complementary states for a given set of quantum states to discriminate.

Lemma 2.4. *Complementary states in minimum-error discrimination of quantum states are uniquely determined.*

Then, for obtained complementary states, it is also not difficult to find POVM elements satisfying the orthogonality condition in Eq. (9). An optimal POVM for state ρ_{x} can be found in the kernel of the state σ_{x}, $\mathcal{K}[\sigma_{\mathrm{x}}] = \mathrm{span}\{|\psi\rangle : \sigma_{\mathrm{x}}|\psi\rangle = 0\}$, i.e. $M_{\mathrm{x}} \in \mathcal{K}[\sigma_{\mathrm{x}}]$. In doing this, POVM elements should be chosen such that $\mathrm{span}\{M_{\mathrm{x}}\}_{\mathrm{x}=1}^{N} = \mathrm{span}\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ so that the completeness condition $\sum_{\mathrm{x}=1}^{N} M_{\mathrm{x}} = I$ is fulfilled. Note also that it holds, $\mathrm{span}\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N} = \mathrm{span}\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$. If given states $\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ are linearly independent, optimal POVM elements must be of rank-one [47].

Now, from Lemma 2.4 that complementary states are unique, to find complementary states is equivalent to have the symmetry operator. One can therefore summarize minimum-error state discrimination in terms of complementary states, without referring directly to optimal measurement. In fact, if the underlying geometry of given states is clear, complementary states can be found from given states to discriminate among, as follows.

To show the geometric formalism, let $\mathcal{P}(\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ denote the polytope of given states constructed in the state space, where the polytope is constructed with each vertex corresponding to $q_{\mathrm{x}}\rho_{\mathrm{x}}$. The condition of symmetry operator in Eq. (8) can be written as,

$$q_{\mathrm{x}}\rho_{\mathrm{x}} - q_{\mathrm{y}}\rho_{\mathrm{y}} = r_{\mathrm{y}}\sigma_{\mathrm{y}} - r_{\mathrm{x}}\sigma_{\mathrm{x}}, \ \forall \ \mathrm{x}, \mathrm{y} = 1, \cdots, N. \tag{15}$$

This means that the unknown polytope of complementary states $\mathcal{P}(\{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$, that is aimed to find to solve state discrimination, is congruent to the polytope of given states, and hence is immediately shaped. Then, the optimal discrimination follows by locating $\mathcal{P}(\{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ in the state space such that, together with given polytope $\mathcal{P}(\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$, the symmetry operator can be constructed. This is equivalent to the condition that corresponding lines are anti-parallel, see Eq. (15). An approach to construct the symmetry operator can be done by rewriting the symmetry operator in Eq. (8) as,

$$K = \frac{1}{N}\sum_{\mathrm{x}=1}^{N} q_{\mathrm{x}}\rho_{x} + \frac{1}{N}\sum_{\mathrm{x}=1}^{N} r_{\mathrm{x}}\sigma_{x}. \tag{16}$$

This corresponds to the sum of two centers of two respective polytopes $\mathcal{P}(\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ and $\mathcal{P}(\{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$, and can be seen as a quantum analogy of the formalism, the center of masses of many particles in classical physics. Then, given the two congruent polytopes in the state space, a symmetry operator can be obtained by rotating the not-yet-fixed one $\mathcal{P}(\{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ with respect to the fixed one $\mathcal{P}(\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$, such that operators from two constructions in Eqs. (8) and (16) are identical.

To apply the geometric formulation in the above, one should be able to describe the geometry of quantum states in the state space. The difficulty is clearly the lack of a general picture to quantum state space apart from two-dimensional cases, i.e. qubit state space. Nevertheless, a high-dimensional Hilbert space may not be necessarily referred to, but the underlying geometry of them determined only by relations of given states is essential.

In addition, in the other way around, state discrimination can be a tool to investigate the state space geometry. From quantum states in high-dimensions for which optimal discrimination is known, one can envisage a quantum state geometry in high-dimensional Hilbert space. This is to be shown later in Sec. 5

3 General Structures

In this section, we show general structures of minimum-error discrimination: equivalence classes of sets of quantum states, construction of problems of state discrimination, and general expressions of the guessing probability. We mainly exploit results shown in the previous section, those derived from the fact that for a problem of minimum-error discrimination there always exists a symmetry operator which completely characterizes the optimal discrimination. We first define equivalence classes of sets of quantum states using the symmetry operator. As an approach converse to optimal discrimination for given states, from a given symmetry operator we present a systematic way of constructing a set of quantum states such that the optimal discrimination is immediately found. We then show a general and analytic expression of the guessing probability for quantum states, which is also compared to Lemma 2.1.

3.1 Equivalence classes

From Lemma 2.2, a symmetry operator gives a complete characterization of optimal parameters in minimum-error discrimination. Once a symmetry operator is found, the rest to find complementary states and optimal measurements is straightforward. The guessing probability is given by the trace norm of a symmetry operator, see the dual problem in Eq. (7). All these show that if a number of sets of quantum states share the same symmetry operator, solving optimal discrimination for only one of the sets so that a single symmetry operator is obtained already gives optimal discrimination for all other sets. Then, exploiting symmetry operators, sets of quantum states can be classified by the distinguishability.

Definition 3.1. *(Equivalence classes)*
Two sets of quantum states, say $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ and $\{q'_{\mathrm{x}}, \rho'_{\mathrm{x}}\}_{\mathrm{x}=1}^{L}$, are equivalent in minimum-error state discrimination if their symmetry operators are identical up to unitary transformations i.e. identical spectrum. We write two equivalent sets as,

$$\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N} \sim \{q'_{\mathrm{x}}, \rho'_{\mathrm{x}}\}_{\mathrm{x}=1}^{L},$$

and the equivalence class characterized by a symmetry operator K is denoted by $\mathcal{A}_K$. Then, sets of quantum states in the same equivalence class have the same guessing probability.

We also note the covariance property in state discrimination, as follows. Suppose that a symmetry operator K for states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$, is given, and then complementary states $\{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ and optimal measurement $\{M_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ are already found. Then, it holds that for another set of states $\{q_{\mathrm{x}}, U\rho_{\mathrm{x}}U^{\dagger}\}_{\mathrm{x}=1}^{N}$ for a unitary transformation U, the symmetry operator is $UKU^{\dagger}$ and other optimal parameters given by $\{r_{\mathrm{x}}, U\sigma_{\mathrm{x}}U^{\dagger}\}_{\mathrm{x}=1}^{N}$ and $\{UM_{\mathrm{x}}U^{\dagger}\}_{\mathrm{x}=1}^{N}$. It is also clear that the guessing probability remains the same. This shows there exists a unitary connection between two elements from $\mathcal{A}_K$ and $\mathcal{A}_{UKU^{\dagger}}$, respectively, for some unitary transformation U.

We now explain the meaning of equivalence classes in minimum-error state discrimination as follows. To this end, we first recall Lemma 2.1 that in the minimum-error discrimination a measurement device is aimed to guess about random variable X of the preparation, given random variable Y from optimized measurement. That is, a party for the preparation relates a random variable X to quantum state generation, and the other party Bob performs measurement giving Y. Then, here, we assume that two parties are interested only in the guessing probability via optimizing measurement in the relation between X and Y: they are not interested to learn or characterize quantum states employed between preparation and measurement, but only input-output relations of X and Y.

Suppose that Alice selects sets of N states from an equivalence class $\mathcal{A}_K$ of a symmetry operator K and we denote them as $\mathcal{A}_K^{(N)}$, where the superscript means that an element in the class $\mathcal{A}_K^{(N)}$ is a set of N states. To be clear, we write this by $\mathcal{A}_K^{(N)} = \{S_{\mathrm{z}}^{(K,N)} : \mathrm{z} = 1, \cdots\}$ where an element $S_{\mathrm{z}}^{(K,N)}$ for some z is a set of N states for which optimal discrimination is determined by symmetry operator K. It is also noteworthy that, Alice is neither interested to know details about N states, nor let Bob know about her choice. Then, what Alice and Bob do is to communicate each other in order to find an optimal setting in measurement such that Bob's guessing about Alice's input X from outcomes Y in measurement is maximized. To this end, Bob has to search an optimal setting over all possibilities. This, however, does not mean either that Bob learns details about a set of quantum states chosen by Alice, such as dimension, phase, etc. of applied states. Note also that optimal measurement is generally not unique i.e. knowing optimal measurement does not imply given sets of quantum states. Two parties are only interested in the choice of sets of quantum states and the guessing probability of them.

Then, random variable Z specifying an element $S_{\mathrm{z}}^{(K,N)}$ in the equivalence class $\mathcal{A}_K^{(N)}$ cannot be revealed if Alice has not announced, since any choices of $\{S_{\mathrm{z}}^{(K,N)} : \mathrm{z} = 1, \cdots ,\}$ from $\mathcal{A}_K^{(N)}$ give the same guessing probability. That is, since different elements in the class $\mathcal{A}_K^{(N)}$ cannot be distinguished by the guessing probability, Bob can only make a random guess to learn about the random variable Z made to choose a set of states $S_{\mathrm{z}}^{(K,N)}$. To clarify that an equivalence class contains a number of elements, we note that a set $\mathcal{A}_K$ specified K is not measure zero as there are infinite number of resolutions of the operator.

Remark 3.2. *An equivalence class in minimum-state discrimination is not a set of measure zero.*

Therefore, equivalence classes show that Alice can have a freedom of choosing a set of quantum states in such a way that Bob cannot learn about the choice better than a random guess while he optimizes guessing about each state. That is, among two random variables X and Z generated by Alice, while Bob's measurement setting is optimized to guess about X given measurement outcomes Y, guessing about the other one Z is not better than a random guess. This represents some information in preparation that would be never revealed in measurement with a probability better than a random guess, when measurement is prepared to guess about only one random variable.

Proposition 3.3. *While quantum states are employed between preparation and measure-*

ment, two random variables X and Z are chosen in the preparation and the measurement is prepared to make correct guesses at its best about X given measurement outcomes Y. Then, there is a way of constructing random variable Z such that no information about Z is revealed in the measurement.

3.2 Construction of a set of quantum states from a symmetry operator

Recall that a symmetry operator shown in Eq. (8) gives a complete characterization to minimum-error state discrimination, and thus solving state discrimination can be equivalently said to find a corresponding symmetry operator for a given set of quantum states. In this subsection, conversely to solving a problem of optimal discrimination for given states, we here introduce a systematic way of generating sets of quantum states when a symmetry operator is given. Thus, for those sets of quantum states, optimal discrimination is already known. In other words, this provides a way of finding elements of an equivalent class defined by a symmetry operator.

Suppose that a symmetry operator is given by $K \in \mathcal{B}(\mathcal{H})$ which is simply a (bounded) positive operator over a Hilbert space $\mathcal{H}$. As the guessing probability is to be given as $\mathrm{tr}[K]$ at the end (see, Eq. (7)), we note that the operator is not larger than the identity operator in the space. To construct a set of quantum states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ having the operator K as their symmetry operator, the first thing to do is to normalize the operator to interpret it as a quantum state and then make its purification. Let $\widetilde{K}$ denote the normalization, $\widetilde{K} = K/\mathrm{tr}[K]$. We write its purification as $|\psi_K\rangle_{AB} \in \mathcal{H}\otimes\mathcal{H}$ such that $\widetilde{K} = \mathrm{tr}_A |\psi_K\rangle_{AB}\langle\psi_K|$, and the purification is unique up to local unitary transformations on the A system.

Then, the next is to construct N two-outcome and complement measurements on the A system, $M^{\mathrm{x}} = \{M_0^{\mathrm{x}}, M_1^{\mathrm{x}}\}$ with $M_0^{\mathrm{x}} + M_1^{\mathrm{x}} = I$ for $\mathrm{x} = 1, \cdots, N$. Since each measurement is complete, the resulting state in the B system on average (i.e. ensemble average) is described by the operator $\widetilde{K}$. Decompositions of the operator $\widetilde{K}$ are determined by the choice of measurement M^{x} on the A system: let ρ_{x} (σ_x) denote the state resulted by the detection event appeared in Alice's measurement M_0^{x} (M_1^{x}), and we assume that the detection event happens with probability p_{x} ($1 - p_{\mathrm{x}}$). In this way, there are N different decompositions of the operator $\widetilde{K}$,

$$\widetilde{K} \;=\; p_{\mathrm{x}}\rho_{\mathrm{x}} + (1-p_{\mathrm{x}})\sigma_{\mathrm{x}}, \text{ for } \mathrm{x} = 1, \cdots, N \qquad (17)$$

where $\{\rho_x\}_{x=1}^{N}$ are those states that we are interested to discriminate. Given that a measurement device is prepared to discriminate among these states $\{\rho_x\}_{x=1}^{N}$, the *a priori* probability that ρ_{x} is generated is given by $p_{\mathrm{x}}/\sum_{\mathrm{x}=1}^{N} p_{\mathrm{x}}$, which we write by q_{x}.

The ensemble decomposition in Eq. (17) corresponds to the case shown in Eq. (11), or also equivalently in Eq. (8), that an identical ensemble is decomposed into N different ways. In this case, the optimality conditions are presented in Eq. (13) which is also equivalent to the optimality condition in Eq. (9). That is, it immediately follows that optimal discrimination of states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{\mathrm{x}}$ is characterized: the guessing probability is $P_{\mathrm{guess}} = \mathrm{tr}[K]$ from the given operator, and complementary states are $\{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ where r_{x} can be found from the relation in Eq. (8), $r_{\mathrm{x}} = (1-p_{\mathrm{x}})/\mathrm{tr}[K]$ and σ_{x} results from measurement M_1^{x} in the A system.

Proposition 3.4. *(Construction of equivalence classes)*
When a symmetry operator K is provided, an element of the equivalent class $\mathcal{A}_K$ can be constructed as a set of states $\{q_{\rm x},\rho_{\rm x}\}_{\rm x=1}^N$ if there exist a set of POVM elements $\{M_0^{\rm x}\}_{\rm x=1}^N$ on the A system of the purification $|\psi_K\rangle_{AB}$ such that those states $\{\rho_{\rm x}\}_{\rm x=1}^{\rm x}$ are prepared in the B system with probabilities $\{p_{\rm x}\}_{\rm x=1}^N$, respectively, where $p_{\rm x}=q_{\rm x}\mathrm{tr}[K]$ for each $\rm x=1,\cdots,N$. Then, the other POVM elements $\{M_1^{\rm x}\}_{\rm x=1}^N$, which fulfill that $M_0^{\rm x}+M_1^{\rm x}=I$ for each $\rm x$, uniquely find complementary states $\{\sigma_{\rm x}\}_{\rm x=1}^N$ in the B system.

If there exists a symmetry among POVM elements applied in the A system on the purification of a given operator K, there also exists its corresponding symmetry among constructed states $\{\rho_{\rm x}\}_{\rm x=1}^N$. This follows from the relation in the below on the purification of a symmetry operator,

$$(U^T\otimes I)|\psi_K\rangle_{AB}=(I\otimes U)|\psi_K\rangle_{AB},\ \text{for any unitary transformation } U, \tag{18}$$

where T denotes the transpose operator. Note that if U is a unitary then U^T is also unitary. For instance, suppose that there exist unitaries $\{U_{\rm x}^T\}_{\rm x=1}^N$ that fulfills $U_{\rm x}^T M_i^1 (U_{\rm x}^T)^\dagger = M_i^{\rm x}$ for $i=0,1$ and $\rm x=1,\cdots,N$. Then, from the relation in Eq. (18), there exist transformations $\{U_{\rm x}\}_{\rm x=1}^N$ among states constructed $\{\rho_{\rm x}\}_{\rm x=1}^N$ as $\rho_{\rm x}=U_{\rm x}\rho_1U_{\rm x}^\dagger$ for all $\rm x=1,\cdots,N$.

Before to proceed, we present an example that shows how the method of constructing a set of quantum states can be applied, when a symmetry operator is given. This is simple but also useful to see how all that have been explained work out. Further examples are also presented in Sec. 4.

Example. (Equivalence class of a normalized identity operator) Suppose that a symmetry operator is given as the identity operator in a d-dimensional Hilbert space, $K=I/d$. Take one of spectral decomposition of the identity, we write it using orthonormal basis $\{|k\rangle\}_{k=1}^d$: $I=\sum_{k=1}^N|k\rangle\langle k|$. Since the symmetry operator is normalized, the guessing probability for quantum states to be constructed is to be $P_{\rm guess}=1$. The purification is the maximally entangled state, $|\psi_K\rangle=\sum_{k=1}^d|k\rangle|k\rangle/\sqrt{d}$. Applying measurement $\{M_0^{\rm x}=|{\rm x}\rangle\langle{\rm x}|, M_1^{\rm x}=I-M_0^{\rm x}\}_{\rm x=1}^d$ on the A system, the following ensemble is prepared in the B system,

$$K=\frac{1}{d}|{\rm x}\rangle\langle{\rm x}|+\frac{d-1}{d}\sigma_{\rm x},\ \text{where } \sigma_{\rm x}=\frac{1}{d-1}\sum_{\rm y\neq x}|{\rm y}\rangle\langle{\rm y}|,\ \forall\ {\rm x}=1,\cdots,d$$

This defines a problem of state discrimination for orthogonal states $\{1/d,|{\rm x}\rangle\}_{\rm x=1}^N$. Complementary states are shown in the above, and optimal measurements are also straightforward to find. Thus, it is shown that $\{1/d,|{\rm x}\rangle\}_{\rm x=1}^N\in\mathcal{A}_{I/d}$.

Finally, we also summarize the method of constructing a set of quantum states using a symmetry operator: for those states, the state discrimination is completely characterized by the symmetry operator.

Remark 3.5. *Following Proposition 3.4, one can generate a set of quantum states $\{q_{\rm x},\rho_{\rm x}\}$ for which the guessing probability is already known. This also applies the construction in*

Eq. (13). Following the results shown so far, the construction works as follows. Suppose that a bipartite state $|\psi\rangle_{AB}$ *is given. From the state, one can arbitrarily find two-outcome measurement on Alice's side,* $\{M_0^{\mathrm{x}}, M_1^{\mathrm{x}}\}_{\mathrm{x}=1}^N$ *where* $M_0^{\mathrm{x}} + M_1^{\mathrm{x}} = I$*. Suppose that by Alice's measurement, Bob holds the following states, for some* $\mathrm{x} = 1, \cdots, N$,

$$\rho_B^{(\mathrm{x})} = p_{\mathrm{x}}\rho_{\mathrm{x}} + (1 - p_{\mathrm{x}})\sigma_{\mathrm{x}}$$

where $p_{\mathrm{x}}\rho_{\mathrm{x}}$ *(*$(1-p_{\mathrm{x}})\sigma_{\mathrm{x}}$*) results from POVM* M_0^{x} *(*M_1^{x}*). Thus,* $\{p_{\mathrm{x}}\}_{\mathrm{x}=1}^N$ *are known from the construction. Then, one can already have optimal discrimination among* $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^N$ *with* $q_{\mathrm{x}} = p_{\mathrm{x}} / \sum_{\mathrm{y}=1}^N p_{\mathrm{y}}$*, as*

$$p_{\mathrm{guess}} = \frac{1}{p_1 + p_2 + \cdots + p_N}.$$

Note that this does not explain yet how the optimal measurement can be found. This shows how problems of minimum-error state discrimination can be generated while the guessing probability is already known.

3.3 Analytic expression of the guessing probability

In this subsection, we present general expressions of the guessing probability in minimum-error state discrimination. We show two of general forms. The first one based on the optimality conditions corresponds to a quantum analogy of the probabilistic-theoretic measure shown in Eq. (3). The next one is in accordance with other physical theories, ensemble steering on quantum states and the no-signaling principle on measurement outcomes. As it is shown in Sec 2.2 that optimality conditions obtained from different contexts, convex operational method or the no-signaling framework, are equivalent, the two forms of the guessing probability are equivalent.

Quantum analogy to the probability-theoretic expression

Let us first provide a form the guessing probability for quantum states, in the framework of probability-theoretic measures. As it is shown in Lemma 2.1, the guessing probability about random variable X given Y is generally expressed as the distance of probability $P_{X|Y}$ deviated from the uniform distribution. This holds for any situations, no matter what physical systems are applied between the preparation and the measurement, to mediate X and Y. Then, it remains to determine the form of $d(X|Y)$ when quantum systems are applied.

Suppose that a set of quantum states is given, $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^N$. Recall that from the KKT conditions there exists the symmetry operator for the optimal discrimination, such that

$$K = q_{\mathrm{x}}\rho_{\mathrm{x}} + r_{\mathrm{x}}\sigma_{\mathrm{x}}, \text{ for } \mathrm{x} = 1, \cdots, N, \text{ with complementary states } \{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^N.$$

Using the simple identity that $K = \sum_{\mathrm{x}=1} K/N$, we have

$$P_{\mathrm{guess}} = \frac{1}{N}\mathrm{tr}[\sum_{\mathrm{x}} q_{\mathrm{x}}\rho_{\mathrm{x}} + r_{\mathrm{x}}\sigma_{\mathrm{x}}] = \frac{1}{N} + R, \text{ where } R = \frac{1}{N}\sum_{\mathrm{x}=1}^N r_{\mathrm{x}}, \tag{19}$$

This compares to Eq. (3): the distance $d(X|Y)$ corresponds to the dual parameters R, which shows the norm of the ensemble average of complementary states.

The parameter R in the expression in Eq. (19) in fact has a geometrical meaning in the state space. Recall from the subsection 2.3 that each complementary state is determined as a vertex of the polytope that is congruent to the polytope constructed by given states, $\mathcal{P}(\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$. Then, each state $r_{\mathrm{x}}\sigma_{\mathrm{x}}$ plays the role of the (trace) distance between each vertex $q_{\mathrm{x}}\rho_{\mathrm{x}}$ of the polytope and the symmetry operator, i.e.

$$r_{\mathrm{x}} = \mathrm{tr}[r_{\mathrm{x}}\sigma_{\mathrm{x}}] = \mathrm{tr}[K - q_{\mathrm{x}}\rho_{\mathrm{x}}] = \|K - q_{\mathrm{x}}\rho_{\mathrm{x}}\|_1,$$

where note that $K \geq q_{\mathrm{x}}\rho_{\mathrm{x}}$ for all $\mathrm{x} = 1, \cdots, N$, from the dual problem in Eq. (7).

Proposition 3.6. *The guessing probability for quantum states* $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ *constructed from a symmetry operator* K *is,*

$$P_{\mathrm{guess}} = \frac{1}{N} + R(K||\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}), \text{ with } R(K||\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}) = \frac{1}{N}\sum_{x=1}^{N} \|K - q_{\mathrm{x}}\rho_{\mathrm{x}}\|_1, \quad (20)$$

where $R(K||\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ *shows the averaged trace distance of given states* $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ *deviated from their symmetry operator* K*, see also Eq. (3) in Lemma 2.1 for comparison.*

General expression for probabilistic and physical models

The next form of the guessing probability for discrimination among states $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ is obtained by the compatibility between ensemble steering on quantum states and the no-signaling condition on probability distributions of measurement outcomes. Then, as it is shown in Lemma 2.3, the guessing probability is given by

$$P_{\mathrm{guess}} = \frac{1}{p_1 + \cdots + p_N}, \text{ with } p_{\mathrm{x}} = q_{\mathrm{x}} P_{\mathrm{guess}}, \text{ for } \mathrm{x} = 1, \cdots, N \quad (21)$$

since the bound in Eq. (13) is tight. From the ensemble steering shown in Eq. (11), the guessing probability can be interpreted as follows. Each parameter p_{x} of $\{p_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$ in the above shows the probability that a party can prepare a quantum state ρ_{x} to the other party at a distance via the ensemble steering. Therefore, the guessing probability corresponds to the maximal average probability to prepare a set of chosen quantum states to a distant party via the ensemble steering.

Theorem 3.7. *(Steerabiity and state discrimination)*
While ensemble steering is allowed within quantum theory, the steerability of a quantum state in the ensemble is generally proportional to the guessing probability for those states prepared in the ensemble.

Simplification for equal prior probabilities

Finally, for state discrimination for $\{q_{\mathrm{x}}, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$, a huge simplification can be derived when prior probabilities are equal i.e. $q_{\mathrm{x}} = 1/N$ for all x. The simplification is made in the expression of R in Eq. (20): it holds that $r_{\mathrm{x}} = r_{\mathrm{y}}$ for all $\mathrm{x}, \mathrm{y} = 1, \cdots, N$. This is straightforward.

The symmetry operator in Eq. (8) shows that $P_{\text{guess}} = \text{tr}[K] = q_{\text{x}} + r_{\text{x}}$, and now since $q_{\text{x}} = 1/N$, it holds that $r_{\text{x}} = r_{\text{y}}$ for all x, y. From Lemma 3.6, this means that distances of given states from the symmetry operator are all equal. Thus, for convenience, let us write

$$r := r_{\text{x}}, \ \forall \ \text{x} = 1, \cdots, N, \ \text{ and then, } \ r = R(K \| \{1/N, \rho_{\text{x}}\}_{\text{x}=1}^{N}). \tag{22}$$

The problem also becomes simpler. There is only a single parameter r to find, in order to solve optimal quantum state discrimination for the uniform prior.

Applying the geometric formulation shown in the subsection 2.3, the geometrical meaning of the parameter r in Eq. (22) can be found in a simple way. We refer to the KKT condition in Eq. (8), which also means that the following holds between given states and complementary states, see also Eq. (15),

$$\frac{1}{N}\rho_{\text{x}} - \frac{1}{N}\rho_{\text{y}} = r\sigma_{\text{y}} - r\sigma_{\text{x}}, \ \text{and then,} \ r = \frac{\| \frac{1}{N}\rho_{\text{x}} - \frac{1}{N}\rho_{\text{y}} \|_1}{\|\sigma_{\text{x}} - \sigma_{\text{y}}\|_1} \tag{23}$$

Then, the parameter r corresponds to the ratio between two polytopes in the state space, the given one $\mathcal{P}(\{\frac{1}{N}, \rho_{\text{x}}\}_{\text{x}=1}^{N})$ constructed from given states and the other one $\mathcal{P}(\{\sigma_{\text{x}}\}_{\text{x}=1}^{N})$ only of complementary states.

Proposition 3.8. *The guessing probability for quantum states given with the uniform prior is determined by only a single parameter as*

$$P_{\text{guess}} = \frac{1}{N} + r, \tag{24}$$

where r is the ratio between two polytopes, one from given states and the other from complementary states.

4 Examples: solutions in qubit state discrimination

In this section, we apply general results shown in the previous sections, to an arbitrary set of qubit states. Qubits are the unit of quantum information processing and, practically, the most promising resources in realizations of quantum information applications. Hence, results to be presented here are not only of theoretical interest to characterize quantum capabilities of state-discriminateion-based tasks, but also useful for practical applications. Along the line of state discrimination, solutions are known for arbitrary two qubit states. For more than two states, optimal discrimination is known when given qubit states contain some symmetry, such as geometrically uniform qubit states. In the recent, there has been analytical approaches to qubit state discrimination, one exploiting the dual problem in Eq. (7) [48] and the other from the complementarity problem that analyzing the KKT conditions in Eqs. (8) and (9) [43]. In the latter, an analytic method is presented to solve minimum-error discrimination for any set of qubit states given with the uniform prior.

In the following subsections throughout, we provide numerous cases of qubit state discrimination (including symmetry operator, complementary states, and optimal measurement) where given states may not contain any symmetry among them. In fact, this solves optimal discrimination for many sets of qubit states in which solutions have not been known before.

Let us begin with collecting general results and notations to be used for qubit state discrimination. As for qubit states, a useful and clear geometric picture is present with the Bloch sphere, in which the state geometry is also clear with the Hilbert-Schmidt distance. The other useful fact is that for qubit states, the Hilbert-Schmidt distance is proportional to the trace distance. From this, the geometry formulation in the subsection 2.3 can also be applied.

Lemma 4.1. *For qubit states, the Hilbert-Schmidt and the trace distances, denoted by d_{HS} and d_T respectively, are related by a constant as follows,*

$$d_{HS}(\rho,\sigma) = \sqrt{2}\ d_T(\rho,\sigma), \tag{25}$$

for any qubit states ρ and σ.

The lemma is useful when the trace distance between qubit states is computed via the geometry in the Bloch sphere: once the actual distance measure in the Bloch sphere is computed in the Hilbert-Schmidt norm via the geometry, from Lemma in the above the distance can be converted to the trace norm.

The next useful fact is the orthogonality relation in the following. In the two-dimensional Hilbert space, if two non-negative and Hermitian operators O_1 and O_2 fulfill the orthogonality condition $\mathrm{tr}[O_1 O_2] = 0$, see Eq. (9), the only possibility is that two operators are of rank-one and, once normalized, they are a resolution of the identity operator. That is, if $O_1 \propto |\phi\rangle\langle\phi|$ to satisfy the orthogonality, then the other is uniquely determined $O_2 \propto |\phi^{\perp}\rangle\langle\phi^{\perp}|$, since in the two-dimensional space, the resolution of the identity is given as $I = |\phi\rangle\langle\phi| + |\phi^{\perp}\rangle\langle\phi^{\perp}|$ for any vector $|\phi\rangle$. This means that as long as the optimal strategy in state discrimination is not the application of the null measurement for some state (i.e. $M_{\mathrm{x}} = 0$ for some x), optimal POVM elements and complementary states, that would fulfill the optimality condition in Eq. (9) each other, must be of rank-one and uniquely determined via the aforementioned relation in the above. All these are summarized in the following, exploiting the optimality condition in Eq. (9).

Lemma 4.2. *The followings are conditions for optimal measurement and complementary states in optimal discrimination of qubit states.*

1. *If complementary states are not pure states, then the optimal strategy to have a minimum-error is to apply the null-measurement, i.e. no-measurement for some states gives an optimal strategy [49] [43].*
2. *For cases where optimal strategy is not the null measurement, optimal POVM elements are of rank-one [48] [43] and uniquely determined by complementary states that are also of rank-one [43].*

Proof. 1. Let us decompose a complementary state σ_{x} in the following way $\sigma_{\mathrm{x}} = s_{\mathrm{x}}|\varphi_{\mathrm{x}}\rangle\langle\varphi_{\mathrm{x}}| + (1-s_{\mathrm{x}})|\varphi_{\mathrm{x}}^{\perp}\rangle\langle\varphi_{\mathrm{x}}^{\perp}|$ with some $|\varphi_x\rangle$ and $|\varphi_x^{\perp}\rangle$ in the two-dimensional space. One

can always find two orthogonal vectors to decompose a qubit state in this way. Suppose that $s_{\mathrm{x}} > 0$ so that σ_{x} is not of rank-one. Then, suppose that there exists a POVM element M_{x} such that $\mathrm{tr}[M_{\mathrm{x}}\sigma_{\mathrm{x}}] = 0$. This means that $\langle \varphi_{\mathrm{x}}|M_{\mathrm{x}}|\varphi_{\mathrm{x}}\rangle = \langle \varphi_{\mathrm{x}}^{\perp}|M_{\mathrm{x}}|\varphi_{\mathrm{x}}^{\perp}\rangle = 0$. Since $I = |\varphi_{\mathrm{x}}\rangle\langle\varphi_{\mathrm{x}}| + |\varphi_{\mathrm{x}}^{\perp}\rangle\langle\varphi_{\mathrm{x}}^{\perp}|$, it follows that $\mathrm{tr}[M_{\mathrm{x}}] = \mathrm{tr}[M_{\mathrm{x}}I] = 0$. Since M_{x} is non-negative, we have $M_{\mathrm{x}} = 0$, i.e. no-measurement.
2. Now it is clear that, when two positive operator e.g. σ_{x} and M_{x} fulfill the orthogonality relation, both of them must be of rank-one. Once a complementary state is given, the only choice for its corresponding POVM element which satisfies the orthogonality is that the POVM is in the kernel of the complementary state $\mathcal{K}[\sigma_{\mathrm{x}}]$. Since $\dim\mathcal{H} = 2$ and σ_{x} is of rank-one, it follows that $\dim\mathcal{K}[\sigma_{\mathrm{x}}] = 1$. Thus, the POVM element is also of rank-one and uniquely determined in the one-dimensional kernel space of a complementary state. □

Lemma shown in the above applies directly to the geometric formulation presented in the subsection 2.3 for qubit states. Recall that most of complementary states for which the optimal measurement is not the null POVM element are of rank-one, that is, pure states. This means that complementary states lie at the surface of the Bloch sphere, and the polytope of them $\mathcal{P}(\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ is therefore the maximal within the Bloch sphere. The shape of the polytope $\mathcal{P}(\{r_{\mathrm{x}},\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ is also known to be congruent to the polytope $\mathcal{P}(\{q_{\mathrm{x}},\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ of given states, see the formulation in the subsection 2.3.

Furthermore, let us recall the followings. For the uniform prior probabilities $q_{\mathrm{x}} = 1/N$, as it is shown in Eq. (24) there is only a single parameter to find, in order to solve the optimal discrimination. The parameter is expressed by r in Eq. (24), corresponding to the ratio between two polytopes $\mathcal{P}(\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ and $\mathcal{P}(\{q_{\mathrm{x}} = 1/N,\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$, see the expression in Eq. (23). Note also that $r = r_{\mathrm{x}}$ for all $\mathrm{x} = 1,\cdots,N$ when finding the complementary states $\{r_{\mathrm{x}},\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N}$, as it is shown in Eq. (22).

Lemma 4.3. *The guessing probability for qubit states given with the uniform prior probabilities is in the following form, as it is shown in Eq. (24),*

$$P_{\mathrm{guess}} = \frac{1}{N} + r$$

with the parameter r, the ratio between two polytopes in the state space, $\mathcal{P}(\{q_{\mathrm{x}} = 1/N,\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ constructed from given states and its similar polytope that is also maximal in the Bloch sphere.

Proof. Two polytopes $\mathcal{P}(\{q_{\mathrm{x}} = 1/N,\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ and $\mathcal{P}(\{r,\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ are congruent, and therefore two polytopes $\mathcal{P}(\{q_{\mathrm{x}} = 1/N,\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ and $\mathcal{P}(\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ are similar with the ratio r. For qubit state discrimination, from Lemma 4.2 it holds that most complementary states are of rank-one lying at the surface of the Bloch sphere, and hence $\mathcal{P}(\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ is the maximal in the Bloch sphere. Therefore, the ratio r is given from $\mathcal{P}(\{q_{\mathrm{x}} = 1/N,\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$ and its similar and maximal one $\mathcal{P}(\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$. This completes the proof. □

In what follows, we apply all these results to qubit state discrimination. We also write qubit states using Bloch vectors as, $\rho_{\mathrm{x}} = \rho(\vec{v}_{\mathrm{x}}) = \frac{1}{2}(I + \vec{v}_{\mathrm{x}}\cdot\vec{\sigma})$ where $\vec{\sigma} = (X, Y, Z)$ are Pauli matrices.

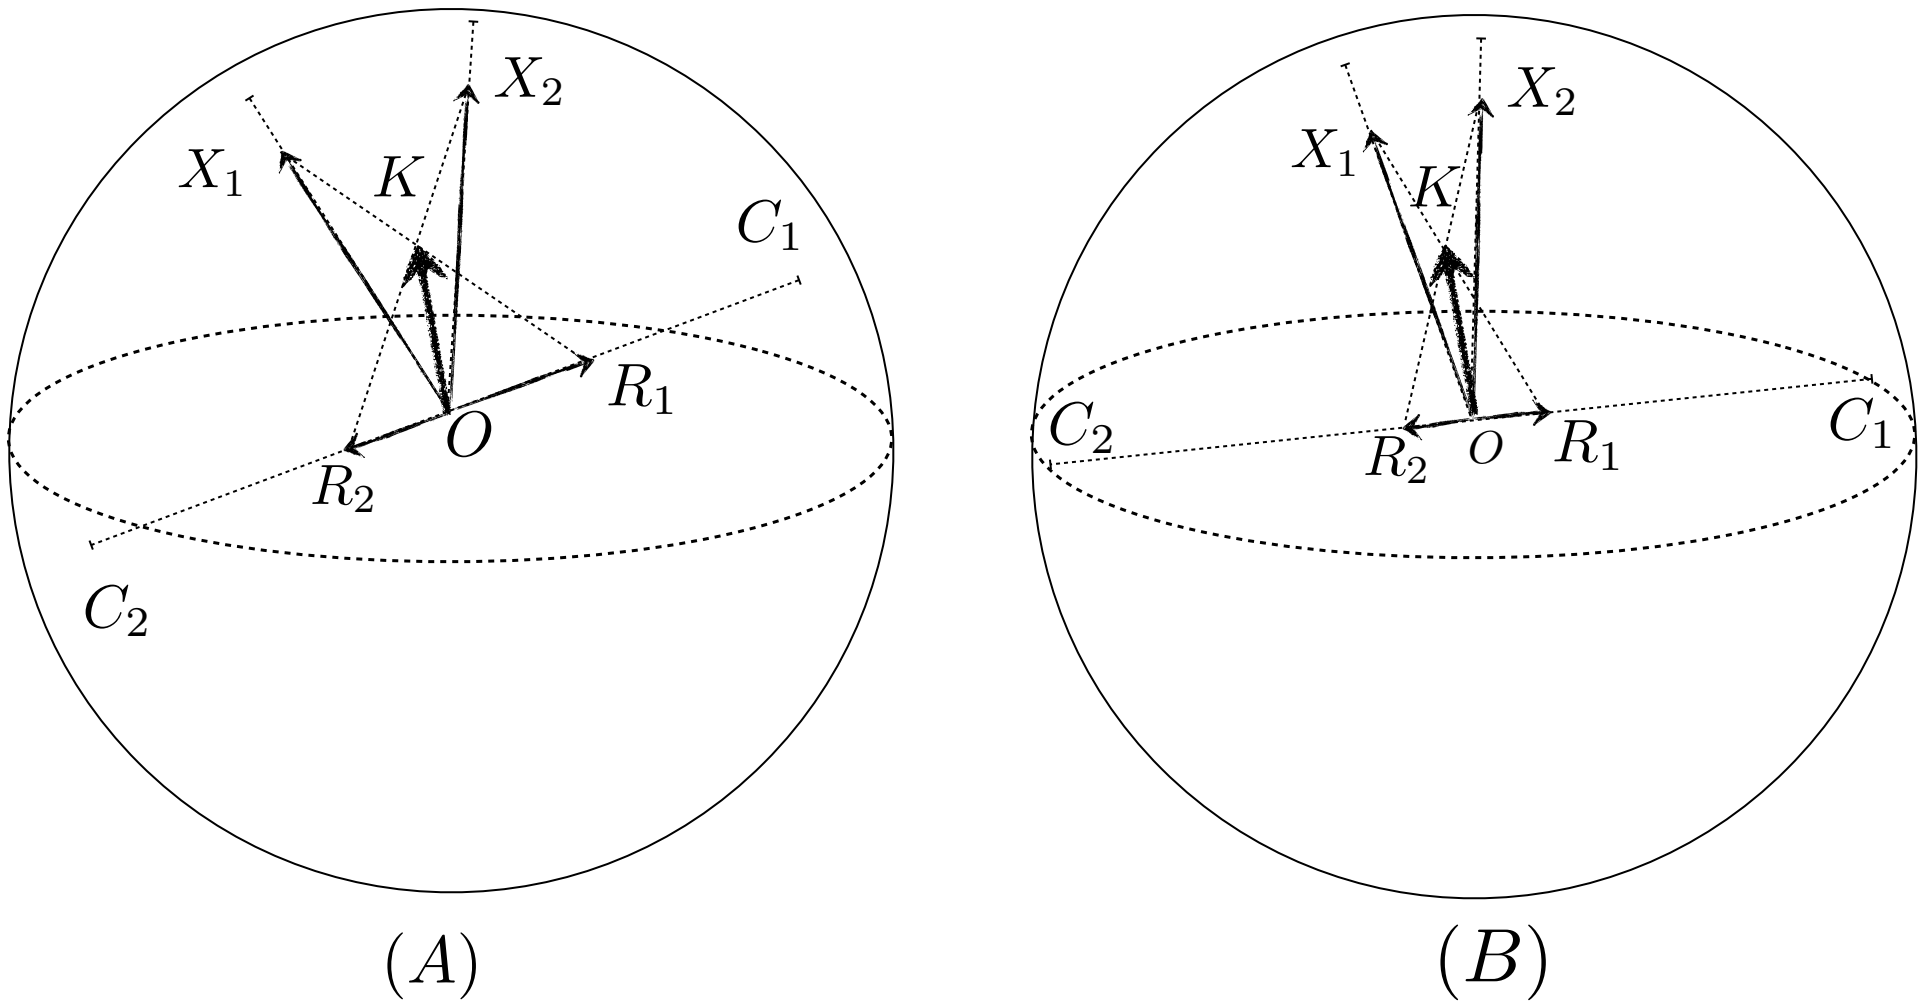

(A) (B)

Figure 1: (Discrimination of two states $\{q_{\rm x},\rho_{\rm x}\}_{\rm x=1}^{2}$) In both figures (A) and (B), given states $q_1\rho_1$ and $q_2\rho_2$ are depicted by two lines OX_1 and OX_2, respectively. The line OK corresponds to the symmetry operator, which is the same in both figures and therefore the guessing probability for two cases is the same, i.e. two cases (A) and (B) are in the same equivalence class. From the geometric formation in the subsection 2.3, complementary states can be found as a polytope congruent to the given polytope X_1X_2 of given states. From Lemma 4.2, complementary states are on the surface. Therefore, R_1R_2 is the polytope congruent to X_1X_2, and then OC_1 and OC_2 are complementary states σ_1 and σ_2 respectively, from which optimal POVM elements for states ρ_1 and ρ_2 are OC_1 and OC_2 respectively. The KKT condition in Eq. (8) holds as $OK = OX_1 + OR_1 = OX_2 + OR_2$, and the other in Eq. (9) $OC_1 \perp OC_2$.

4.1 Two states

When two quantum states are given, the state space spanned by them is effectively two-dimensional. Consequently, discrimination of them is equivalently restricted to two qubit states. This does not lose any generality. Then, for two-state discrimination $\{q_{\rm x},\rho_{\rm x}\}_{\rm x=1}^{2}$, optimal discrimination was shown in Ref. [3],

$$P_{\rm guess} = \frac{1}{2}(1 + \|q_1\rho_1 - q_2\rho_2\|_1). \tag{26}$$

We now reproduce the result using the geometric formalism presented in the subsection 2.3.

The optimal discrimination is obtained if complementary states are found, since complementary states give the symmetry operator that gives the guessing probability, and also defines optimal measurements, see Lemma 2.2. Thus, we now show how to find complementary states from given states. We first rewrite Eq. (15) for the two states,

$$q_1\rho_1 - q_2\rho_2 = r_2\sigma_2 - r_1\sigma_1, \tag{27}$$

where $\{r_{\mathrm{x}}, \sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{2}$ are complementary states to find. Recall Lemma 4.2, complementary states are of rank-one and thus lie at the surface of the Bloch sphere. Then, Eq. (27) in the above means i) two polytopes (lines in this case) by given states and by complementary states, respectively, are congruent and also parallel. Thus, given the line defined by $q_1\rho_1 - q_2\rho_2$ in the Bloch sphere, two complementary states can be found by finding a diameter (since they are pure states) such that the diameter is parallel to the given line, see Fig.1. Two parameters r_1 and r_2 can be found to satisfy the relation in Eq. (27). Then, the symmetry operator is found as $q_{\mathrm{x}}\rho_{\mathrm{x}} + r_{\mathrm{x}}\sigma_{\mathrm{x}}$ for $\mathrm{x} = 1, 2$, and optimal measurements are also defined in the diameter of complementary states as $M_1 \propto \sigma_2$ and $M_2 \propto \sigma_1$.

From the geometric method, the guessing probability can be explicitly written as follows. Note the followings, from Eq. (27)

$$\begin{aligned} r_1 - r_2 &= q_2 - q_1 \\ r_1 + r_2 &= \|r_1\sigma_1 - r_2\sigma_2\|_1 = \|q_1\rho_1 - q_2\rho_2\|_1 \end{aligned}$$

where we recall the fact that two complementary states are found to be orthogonal. Thus, for $\mathrm{x} = 1, 2$

$$r_{\mathrm{x}} = \frac{1}{2}(\|q_1\rho_1 - q_2\rho_2\| + (-1)^{\mathrm{x}}(q_1 - q_2)) \tag{28}$$

Thus, from the general expression shown in Eq. (19) for $N = 2$, the guessing probability is

$$\begin{aligned} P_{\mathrm{guess}} &= \mathrm{tr}[K] = \frac{1}{2} + \frac{1}{2}(r_1 + r_2) = \frac{1}{2}(1 + \|q_1\rho_1 - q_2\rho_2\|), \text{ with,} \\ K &= \frac{1}{2}(q_1\rho_1 + q_2\rho_2) + \frac{1}{2}(r_1\sigma_1 + r_2\sigma_2) \end{aligned} \tag{29}$$

Thus, it is shown that the Helstrom bound is reproduced.

In particular, when $q_1 = q_2 = 1/2$, from Proposition 3.8 it follows that $r = r_1 = r_2 = \|\rho_1 - \rho_2\|/2$. Then, from the expresso in Eq. (29), the symmetry operator has an even simpler form,

$$K = \frac{1}{2}(\frac{1}{2}\rho_1 + \frac{1}{2}\rho_2) + \frac{1}{2}(rI).$$

since two complementary states correspond to the diameter and their average is simply proportional to the identity.

In this case, let us also show how the formulation in Lemma 4.3 can be applied. First, note again that the polytope constructed by given states is the line $q_1\rho_1 - q_2\rho_2$ in the Bloch sphere. Since it is a line, the largest polytope similar to the the line is clearly a diameter that has the length 2 in trace norm. The parameter r in Eq. (24) that we look for is the ratio between two lines,

$$\|\frac{1}{2}\rho_1 - \frac{1}{2}\rho_2\| : 2 = r : 1, \text{ and thus } r = \frac{1}{2}\|\frac{1}{2}\rho_1 - \frac{1}{2}\rho_2\|$$

With the above, the guessing probability is $P_{\mathrm{guess}} = 1/2 + r$, which reproduces the Helstrom bound in Eq. (26) when $q_1 = q_2 = 1/2$.

4.2 Three states

We now move to cases of three qubit states. For three states, no general solution for the minimum-error discrimination has been known to date apart from specific cases when they are symmetric. Here, for three states given with equal prior probabilities, we apply Lemma 4.3 and show how to find optimal discrimination.

4.2.1 Three-state example I: isosceles triangles

We first suppose that three pure states lying at a half-plane, and they are given with equal prior probabilities 1/3, i.e. $\{1/3, \rho_{\mathrm{x}} = |\psi_{\mathrm{x}}\rangle\langle\psi_{\mathrm{x}}|\}_{\mathrm{x}=1}^{3}$. In particular, we suppose that the polytope constructed by the three states forms an isosceles triangle on a half plane of the Bloch sphere. For convenience, we parameterize three states as follows, for some θ_0,

$$\begin{aligned}
|\psi_1\rangle &= \cos\frac{1}{2}(\theta_0+\theta)|0\rangle + \sin\frac{1}{2}(\theta_0+\theta)|1\rangle \\
|\psi_2\rangle &= \cos\frac{1}{2}\theta_0|0\rangle + \sin\frac{1}{2}\theta_0|1\rangle \\
|\psi_3\rangle &= \cos\frac{1}{2}(\theta_0-\theta)|0\rangle + \sin\frac{1}{2}(\theta_0-\theta)|1\rangle,
\end{aligned} \tag{30}$$

where let us suppose $\theta \in [0, \pi]$, see Fig. 2.

We now apply Lemma 4.2 to discrimination among these three states, referring to the geometry shown in Fig. 2. The maximal polytope which is similar to the given one $X_1X_2X_3$ is $S_1S_2S_3$. There are many ways of putting the maximal polytope in the plane, however, it should be put as it is shown in the figure to fulfill the optimality condition Eq. (15), or Eq. (8). Let us first compute the guessing probability. We have to find the ratio r between two polytopes. It corresponds to the ratio, X_1X_3/S_1S_3, which is $r = (\sin\theta)/3$. Therefore, the guessing probability is

$$P_{\text{guess}} = \frac{1}{3} + \frac{1}{3}\sin\theta. \tag{31}$$

In Fig. 2, the guessing probability for the three states is plotted as the angle θ varies. One can easily find that for $\theta \geq \pi/2$, the ratio is $r = 1/3$ and thus the guessing probability is, 2/3.

Let us then find optimal measurement. Note that OS_1, OS_2, and OS_3 correspond to complementary states, σ_1, σ_2, and σ_3, respectively. It is shown that σ_2 is not a pure state, i.e. not of rank-one. This means that, to fulfill the optimality condition in Eq. (9), the optimal POVM element is the null measurement, i.e. $M_2 = 0$, no-measurement on the state. The other complementary states can be written explicitly as follows,

$$\begin{aligned}
\sigma_1 = |\varphi_1\rangle\langle\varphi_1|, &\qquad |\varphi_1\rangle = \cos(\frac{\theta_0}{2} - \frac{\pi}{4})|0\rangle + \sin(\frac{\theta_0}{2} - \frac{\pi}{4})|1\rangle \qquad (32) \\
\sigma_3 = |\varphi_3\rangle\langle\varphi_3|, &\qquad |\varphi_3\rangle = \cos(\frac{\theta_0}{2} + \frac{\pi}{4})|0\rangle + \sin(\frac{\theta_0}{2} + \frac{\pi}{4})|1\rangle
\end{aligned}$$

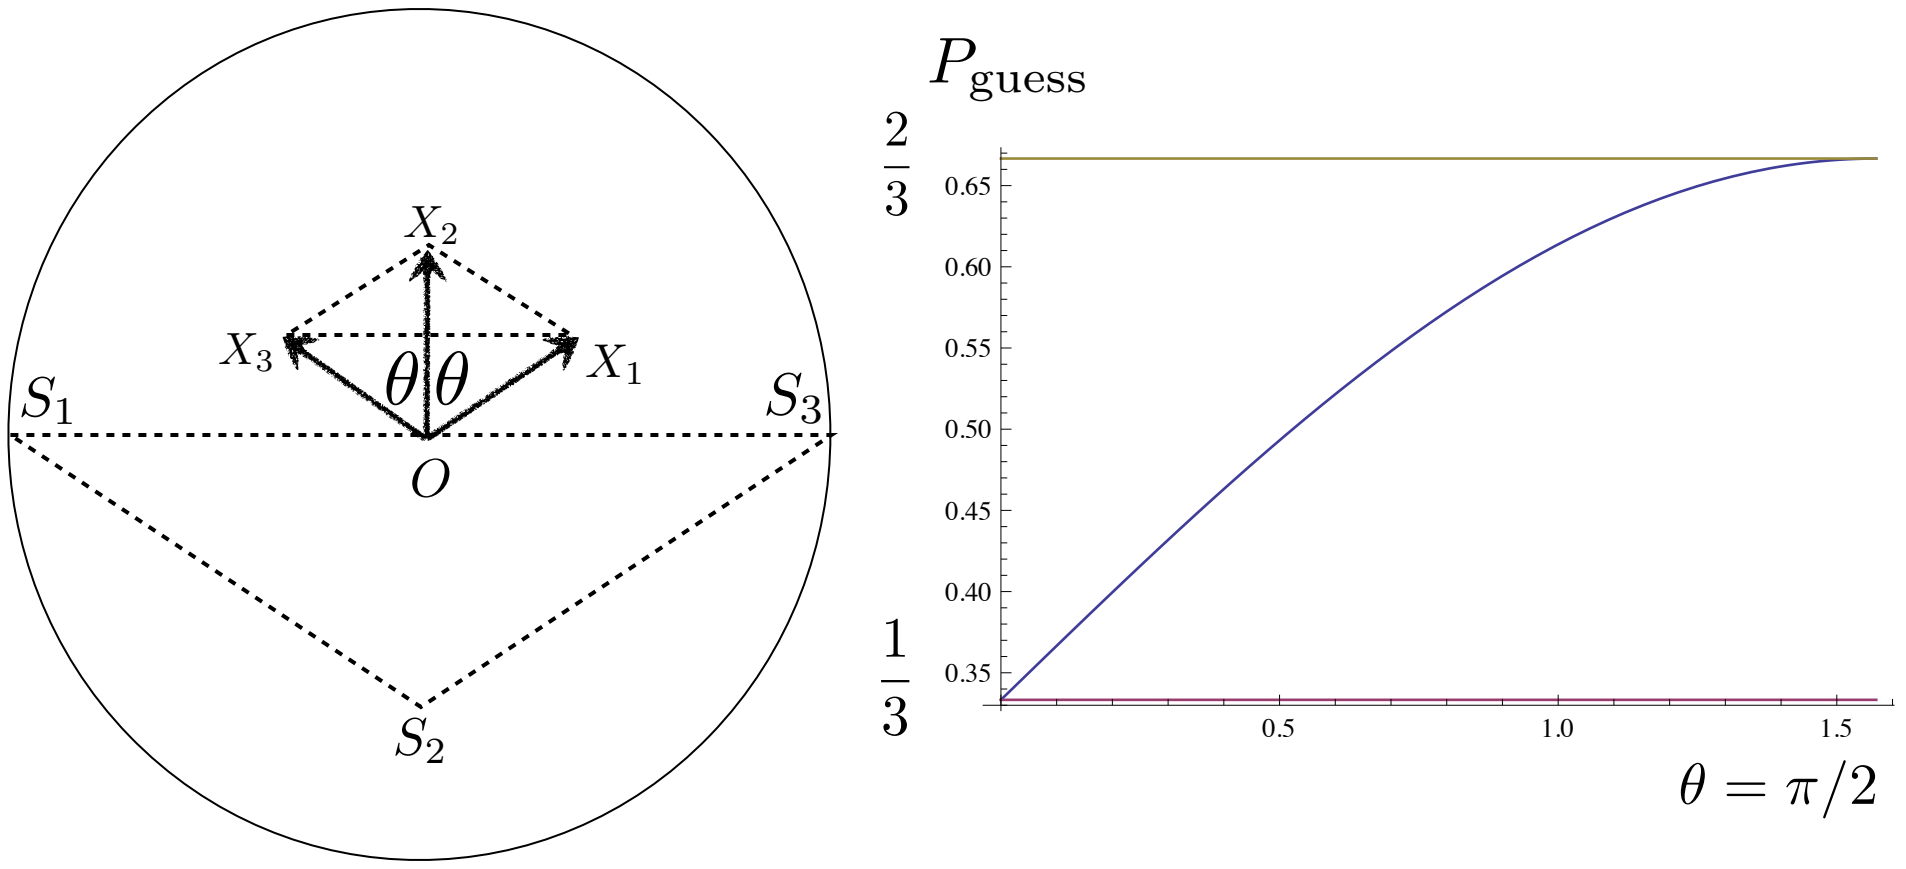

Figure 2: Discrimination of three qubit states $\{q_{\rm x} = 1/3, \rho_{\rm x} = |\psi_{\rm x}\rangle\langle\psi_{\rm x}|\}_{\rm x=1}^{3}$ in a half-plane is shown. It is straightforward to generalize this to three qubit states having the same purity. In the half-plane, each state $\rho_{\rm x}/3$ corresponds to line $OX_{\rm x}$ for $\rm x = 1,2,3$. The three states are defined such that two states ρ_1 and ρ_3 are equally distant from state ρ_2, and the distance is specified by angle θ. Then, the polytope of given states corresponds to the triangle $X_1X_2X_3$, an isosceles triangle. Since they are given with equal probabilities, Lemma 4.3 is applied as follows. The largest triangle similar to $X_1X_2X_3$ is given by $S_1S_2S_3$. The ratio between the two triangles is, $r = (\sin\theta)/3$. Thus, the guessing probability is $P_{\text{guess}} = (1+\sin\theta)/3$. Note that $OS_{\rm x}$ for $\rm x = 1,2,3$ correspond to complementary states. Since the complementary state OS_2 is not pure, optimal POVM for the state ρ_2 is the null measurement, $M_2 = 0$.

and optimal POVM elements are,

$$M_1 = |\varphi_3\rangle\langle\varphi_3|,\ M_2 = 0,\ M_3 = |\varphi_1\rangle\langle\varphi_1|, \ \text{ so that } \sum_{\rm x=1}^{3} M_{\rm x} = I.$$

One can see that with these POVMs, the guessing probability is obtained

$$P_{\text{guess}} = \frac{1}{3}\mathrm{tr}[\rho_1 M_1] + \frac{1}{3}\mathrm{tr}[\rho_2 M_2] + \frac{1}{3}\mathrm{tr}[\rho_3 M_3] = \frac{1}{3} + \frac{1}{3}\sin\theta$$

as it is shown in Eq. (31). Optimal POVM elements show that for discrimination among the three state given with probability 1/3, the optimal strategy corresponds to the measurement setting where the device responds only to two most distant states out of the three.

4.2.2 Three-state example II: geometrically uniform states

The example shown in the previous can be extended to the so-called geometrically uniform states [32] [37], which correspond to the case that $\theta = 2\pi/3$. It is straightforward to exploit

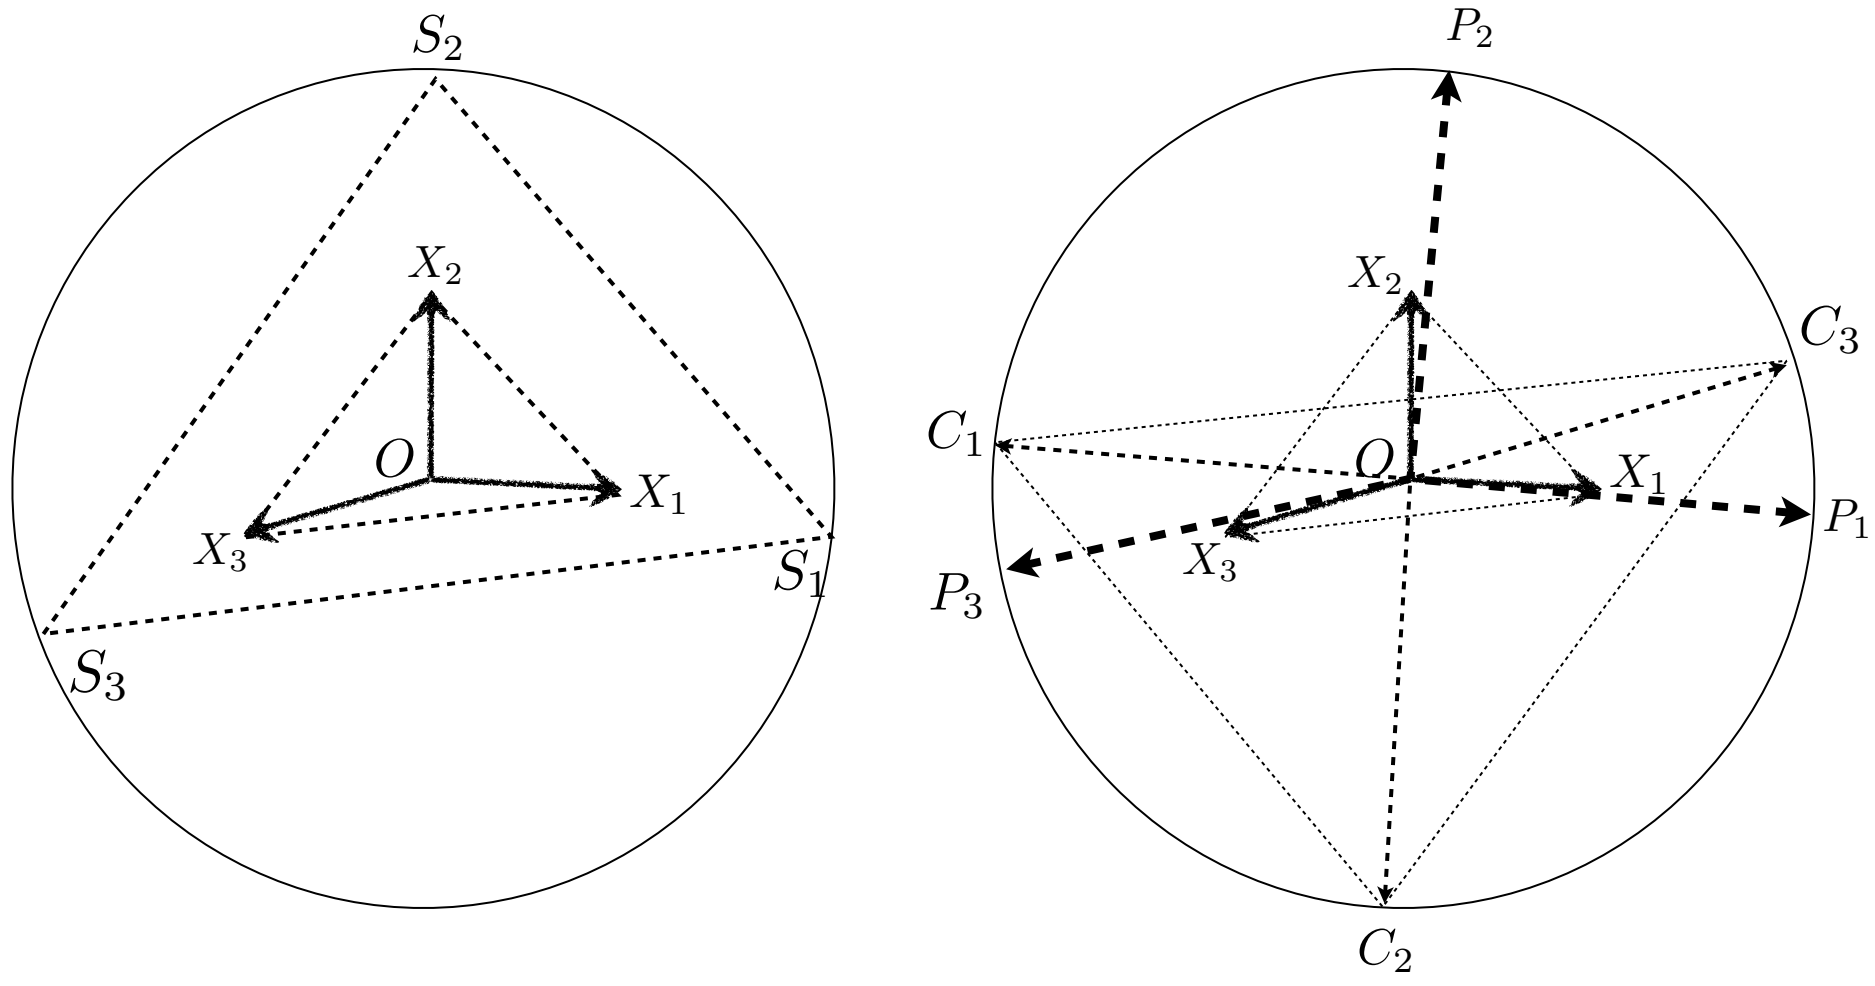

Figure 3: A general method of applying Lemma 4.3 to arbitrarily given three qubit states is shown. Note that prior probabilities are equal, 1/3, and given states correspond to OX_{x} for $\mathrm{x}=1,2,3$, and the polytope of given states is $X_1X_2X_3$. To make the explanation simple, we suppose that a maximal triangle similar to $X_1X_2X_3$, which is $S_1S_2S_3$, is covered by the Bloch sphere. In case one of them does not lie at the surface, one can proceed as it is done in Fig. 2. Then, the ratio between the two triangles can give the guessing probability. Then, complementary states can be found by rotating $S_1S_2S_3$ such that the optimality condition in Eq. (23) is fulfilled. Then, the polytope of complementary states $C_1C_2C_3$ is defined, where one can see that $X_{\mathrm{x}}X_{\mathrm{y}}$ is parallel with $C_{\mathrm{y}}C_{\mathrm{x}}$ for x and y. Optimal measurement can also be found as OP_{x}, $\mathrm{x}=1,2,3$, since OP_{x} is opposite to OC_{x} from the optimality condition in Eq. (9)

the method shown in the above from Lemma 4.2, and then, the guessing probability is 2/3. In fact, as it is to be shown, the guessing probability is found, $P_{\mathrm{guess}}=2/3$ for any three pure (qubit) states given with equal probabilities if the polytope of them in the Bloch sphere contains the origin.

4.2.3 Three-state example III: arbitrary triangles on a half-plane

We now consider a set of three pure states given with equal probabilities 1/3, and suppose that the polytope constructed by the three states forms an arbitrary triangle in a half-plane of the Bloch sphere: $\{1/3, \rho_{\mathrm{x}}=|\psi_{\mathrm{x}}\rangle\langle\psi_{\mathrm{x}}|\}_{\mathrm{x}=1}^{3}$. Contrast to the example isosceles triangles shown in the above, we also suppose that the polytope of given states contains the origin of the Bloch sphere, see Fig. 3.

To apply the geometric formulation in Lemma 4.3, we also refer to Fig. 3. Note that three states $\rho_{\mathrm{x}}/3$ for $\mathrm{x}=1,2,3$ correspond to OX_{x} $\mathrm{x}=1,2,3$, respectively, and thus the ploytope of given states is the triangle $X_1X_2X_3$. Then, the next to do is to find a maximal polytope similar to $X_1X_2X_3$ within the Bloch sphere. A triangle $S_1S_2S_3$ in Fig. 3 can be a possibility. The ratio r corresponds to, for instance, X_1X_2/S_1S_2, which is also equal to OX_1/OS_1: therefore $r = 1/3$, and then the guessing probability is

$$P_{\text{guess}} = \frac{1}{3} + r = \frac{2}{3}.$$

Note that this is the guessing probability for many cases of three pure states as long as their polytope in the Bloch sphere contains the polytope. This can be generalized to cases where three states have the same purity, as follows.

Remark 4.4. *Suppose that three qubit states having an equal purity, which is denoted by* f*, are given with equal prior probabilities* $1/3$*. Here, the purity corresponds to the norm of a Bloch vector. Then, if the polytope of the three states in the Bloch sphere contains the origin, the guessing probability is*

$$P_{\text{guess}} = \frac{1}{3} + \frac{1}{3}f.$$

This is independent to other details, such as relations, of given three states.

The triangle $S_1S_2S_3$ in Fig. 3 does not show complementary states yet, since the optimality condition in Eq. (15), or equivalently Eq. (8), is not fulfilled. Therefore, one has to put or rotate $S_1S_2S_3$ to $C_1C_2C_3$ in Fig. 3, so that Eq. (15) holds true: $X_{\mathrm{x}}X_{\mathrm{y}} \parallel C_{\mathrm{y}}C_{\mathrm{x}}$ for all $\mathrm{x}, \mathrm{y} = 1, 2, 3$, where $\parallel$ means that two lines are parallel. Then, all optimality conditions are satisfied.

Complementary states are then those states corresponding to OC_{x} for $\mathrm{x} = 1, 2, 3$. It also follow that optimal POVM elements are OP_{x} for $\mathrm{x} = 1, 2, 3$ as each of them is orthogonal to its corresponding complementary state, see the optimality condition in Eq. (9). Thus, optimal POVM elements are $\{M_{\mathrm{x}} \propto OP_{\mathrm{x}}\}_{\mathrm{x}=1}^{3}$. Since the convex hull $P_1P_2P_3$ contains the origin, it is also straightforward to have the completeness, $\sum_{\mathrm{x}=1}^{3} M_{\mathrm{x}} = I$. Here, it is noteworthy that optimal POVMs can be in vectors which are not parallel to corresponding states: in Fig. 3, we found that $OX_{\mathrm{x}} \nparallel OP_{\mathrm{x}}$ for some x.

4.2.4 Three-state example IV: arbitrary triangles

Finally, let us show how the geometric formulation in Lemma 4.3 can be generally applied to a set of arbitrary three qubit states when they are given with equal probabilities, $\{1/3, \rho_x\}_{\mathrm{x}=1}^{3}$. We explain this, referring to Fig. 4. Arbitrary three states are depicted by OX_{x} for $\mathrm{x} = 1, 2, 3$ respectively.

Once they are given, they define a plane of the triangle $X_1X_2X_3$ in the Bloch sphere, and there exists a half-plane parallel to the plane. To find the guessing probability for the states, one has to first find a maximal triangle that is similar to the triangle $X_1X_2X_3$ in the Bloch sphere. Then, the maximal one must lie on the half-plane parallel to $X_1X_2X_3$, to fulfill the optimality condition in Eq. (15), or equivalently Eq. (8). And then, the maximal one is rotated such that the condition in Eq. (15) is fulfilled, and finally ends up with $C_1C_2C_3$. Then, complementary states are immediately found as OC_{x} for $\mathrm{x} = 1, 2, 3$, from which optimal measurement also follows as those POVM elements orthogonal to complementary states.

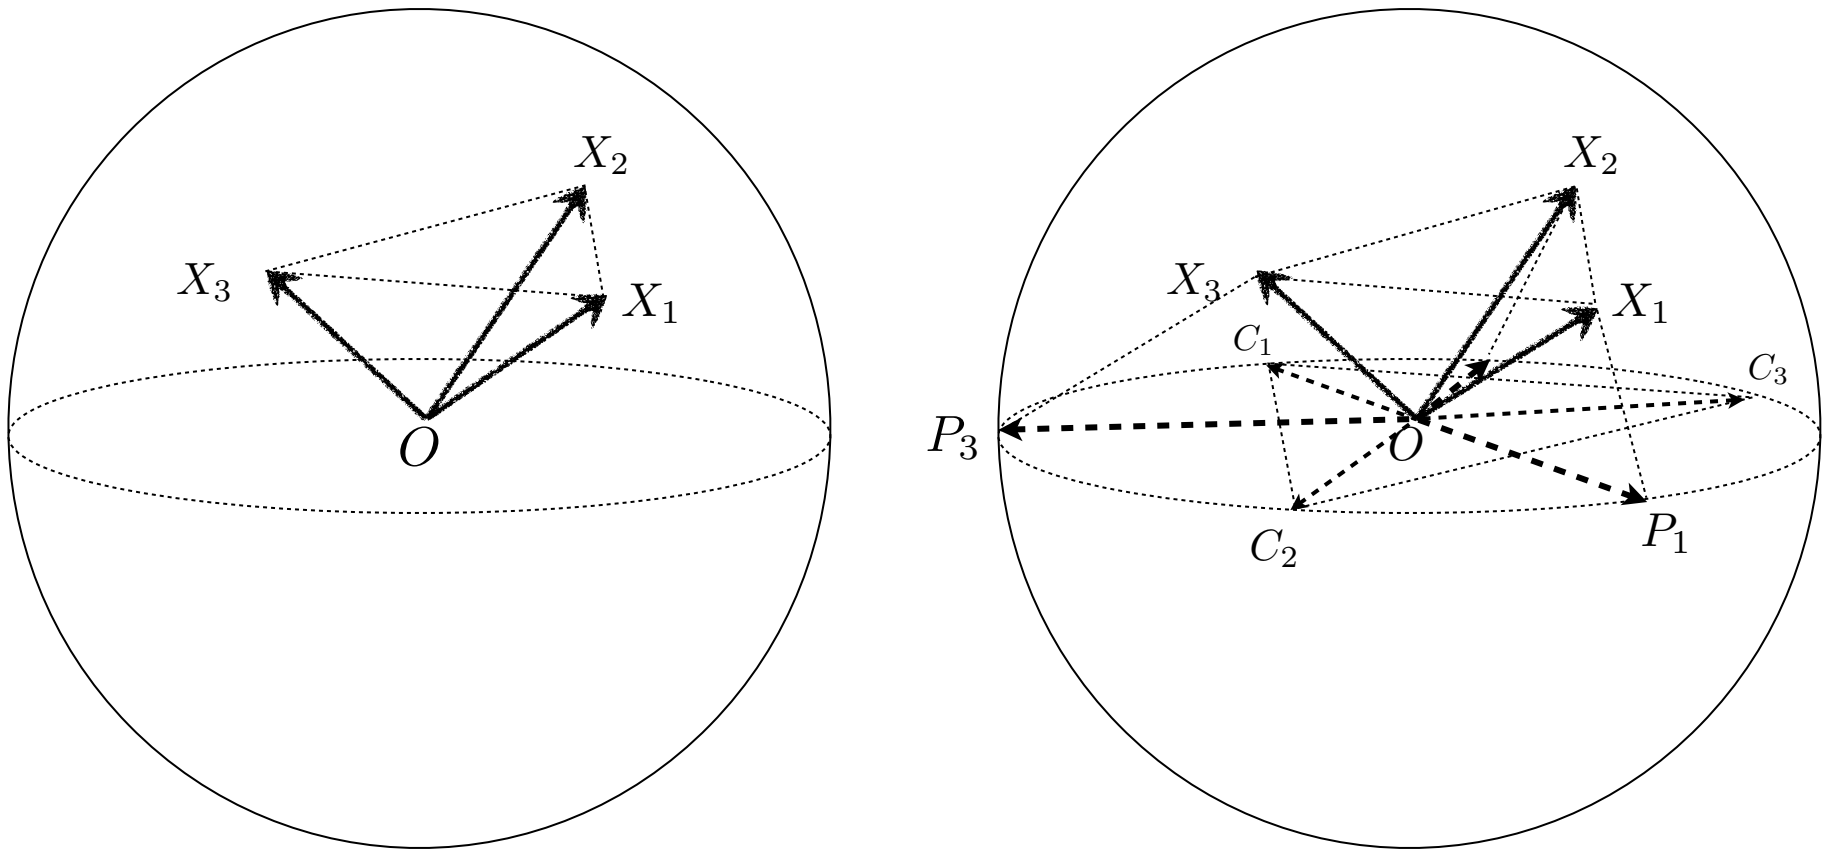

Figure 4: Arbitrary three qubit states are given with equal prior probabilities 1/3. They are denoted by OX_{x} for $\mathrm{x} = 1, 2, 3$. The polytope of given states $X_1 X_2 X_3$ defines a plane, and then complementary states and optimal POVM elements lie on the half-plane which is parallel to the defined plane. See the subsection 4.2.4 for more details.

4.3 Four states

We now consider discrimination among four qubit states. We begin with a simple case, pairs of orthogonal states. Then, cases where four states define a quadrilateral are considered. Finally, we also show how the geometric formulation can be applied when four states form a tetrahedron in the Bloch sphere.

4.3.1 Four-state example I: rectangles

Let us first consider pairs of orthogonal states, say $\{1/4, \rho_{\mathrm{x}} = |\psi_{\mathrm{x}}\rangle\langle\psi_{\mathrm{x}}|\}_{\mathrm{x}=1}^{4}$, where $\langle\psi_1|\psi_3\rangle = \langle\psi_2|\psi_4\rangle = 0$. The four states define a plane in the Bloch sphere, and then form a rectangle on the plane. To be explicit, they can be written as follows, for some θ_0 and θ,

$$\begin{aligned}
|\psi_1\rangle &= \cos\frac{\theta_0}{2}|0\rangle + \sin\frac{\theta_0}{2}|1\rangle, \\
|\psi_2\rangle &= \cos(\frac{\theta_0}{2} - \theta)|0\rangle + \sin(\frac{\theta_0}{2} - \theta)|1\rangle, \\
|\psi_3\rangle &= \cos(\frac{\theta_0}{2} - \frac{\pi}{2})|0\rangle + \sin(\frac{\theta_0}{2} - \frac{\pi}{2})|1\rangle, \\
|\psi_4\rangle &= \cos(\frac{\theta_0}{2} - \theta - \frac{\pi}{2})|0\rangle + \sin(\frac{\theta_0}{2} - \theta - \frac{\pi}{2})|1\rangle, \qquad (33)
\end{aligned}$$

which are shown in Fig. 5. The half-plane in which the four states lie is then defined in the Bloch sphere.

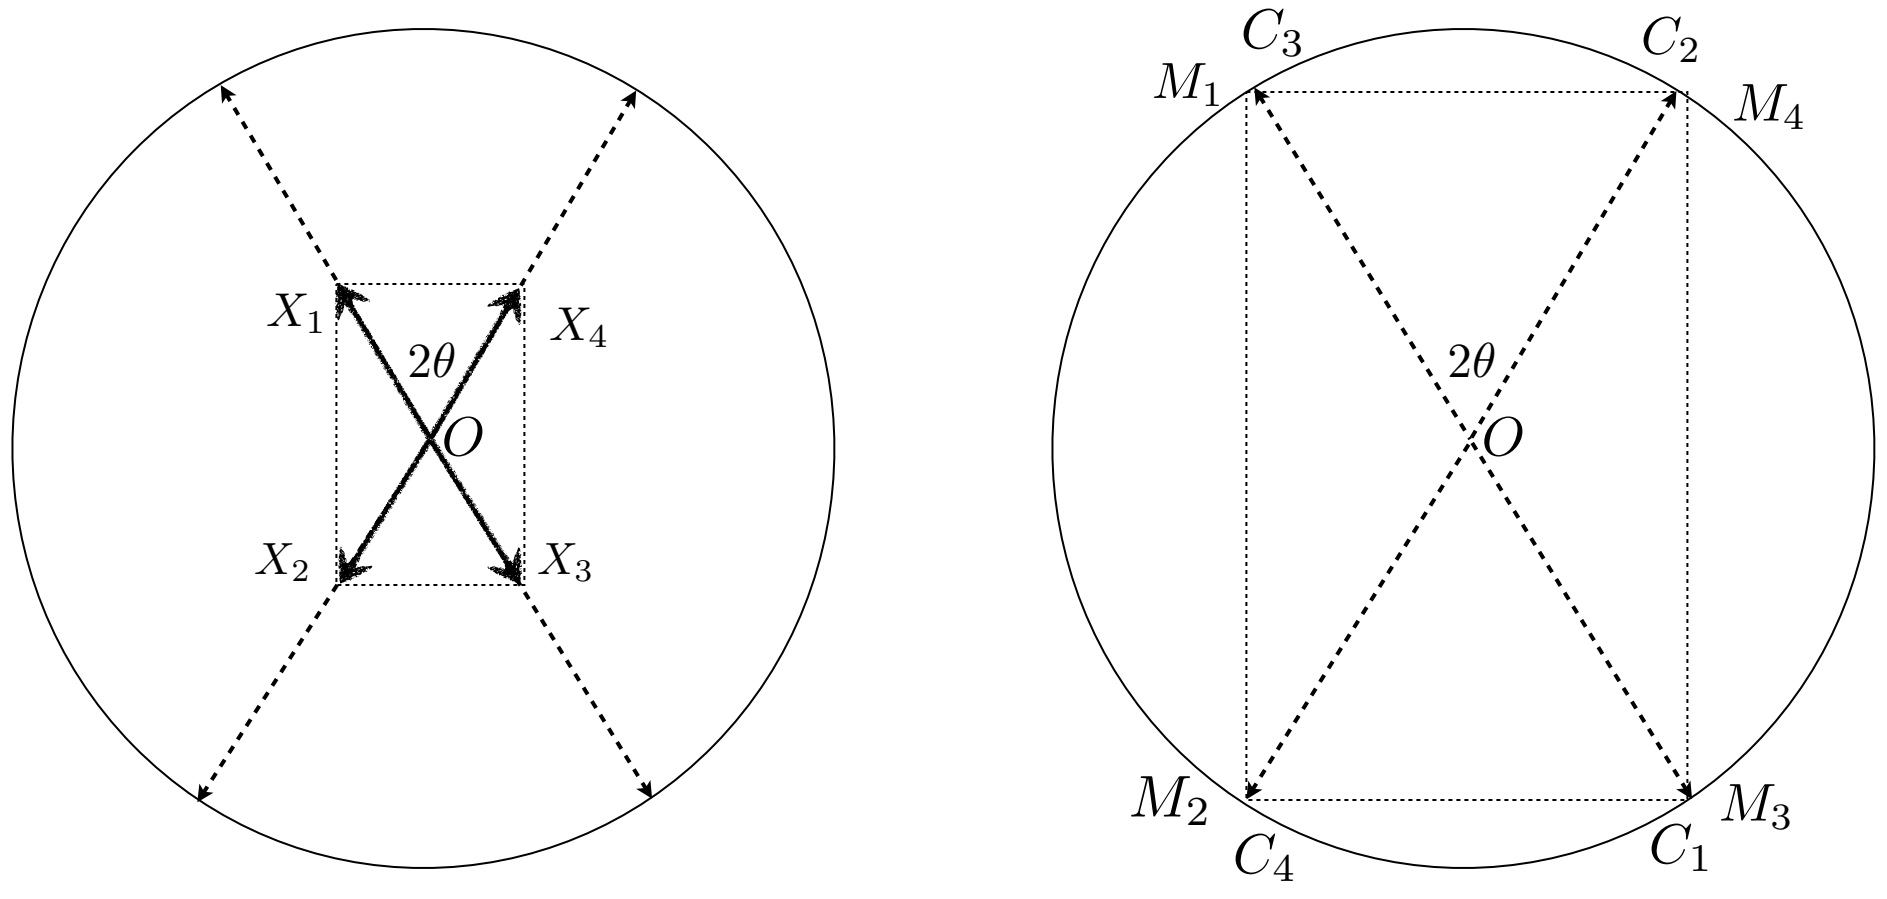

Figure 5: Discrimination of pairs of two orthogonal states, $\{1/4, \rho_{\mathrm{x}} = |\psi_{\mathrm{x}}\rangle\langle\psi_{\mathrm{x}}|\}_{\mathrm{x}=1}^{4}$ (see also Eq. (33)), is shown. Each state $\rho_{\mathrm{x}}/4$ corresponds to OX_{x} for $\mathrm{x} = 1, 2, 3, 4$. Complementary states can be easily found by enlarging and inverting the given polytope $X_1X_2X_3X_4$ so that the optimality condition in Eq. (23) is fulfilled. Then, the complementary states form the rectangle $C_1C_2C_3C_4$, from which optimal measurement can also be found as, $\{M_{\mathrm{x}} \propto OM_{\mathrm{x}}\}_{\mathrm{x}=1}^{4}$, see Eq. (34). The ratio between two rectangles is 1/4, and thus the guessing probability 1/2.

Referring to Fig. 5, we apply the geometric formulation in Lemma 4.3, and show optimal parameters, optimal measurement and complementary states. The polytope of given states is the rectangle $X_1X_2X_3X_4$. It is straightforward to see that the largest one smiler to $X_1X_2X_3X_4$ is the rectangle having its diagonal in length 2 (in terms of trace-norm). Then, we rotate it so that the relation in Eq. (15), or the optimality condition in Eq. (8), is satisfied, and then we have the rectangle $C_1C_2C_3C_4$. The complementary states are found as OC_{x} for $\mathrm{x} = 1, 2, 3, 4$, from which optimal POVM elements are also obtained $\{M_{\mathrm{x}} \propto OM_{\mathrm{x}}\}_{\mathrm{x}=1}^{4}$. Therefore, we have optimal parameters as follows

$$\begin{aligned} &M_1 = \sigma_3 = |\psi_1\rangle\langle\psi_1|, \quad M_2 = \sigma_4 = |\psi_2\rangle\langle\psi_2|, \\ &M_3 = \sigma_1 = |\psi_3\rangle\langle\psi_3|, \quad M_4 = \sigma_2 = |\psi_4\rangle\langle\psi_4|. \end{aligned} \tag{34}$$

From these, the guessing probability can be obtained. Or, applying Lemma 4.2, one can see the ratio, for instance,

$$r = \frac{X_1X_2}{C_1C_2} = \frac{OX_1}{OC_1} = \frac{1}{4}, \text{ and thus, } P_{\text{guess}} = \frac{1}{4} + r = \frac{1}{2}. \tag{35}$$

We remark that, as it is shown in the above, the guessing probability is equal in the range of angle $0 \leq \theta \leq \pi/2$.

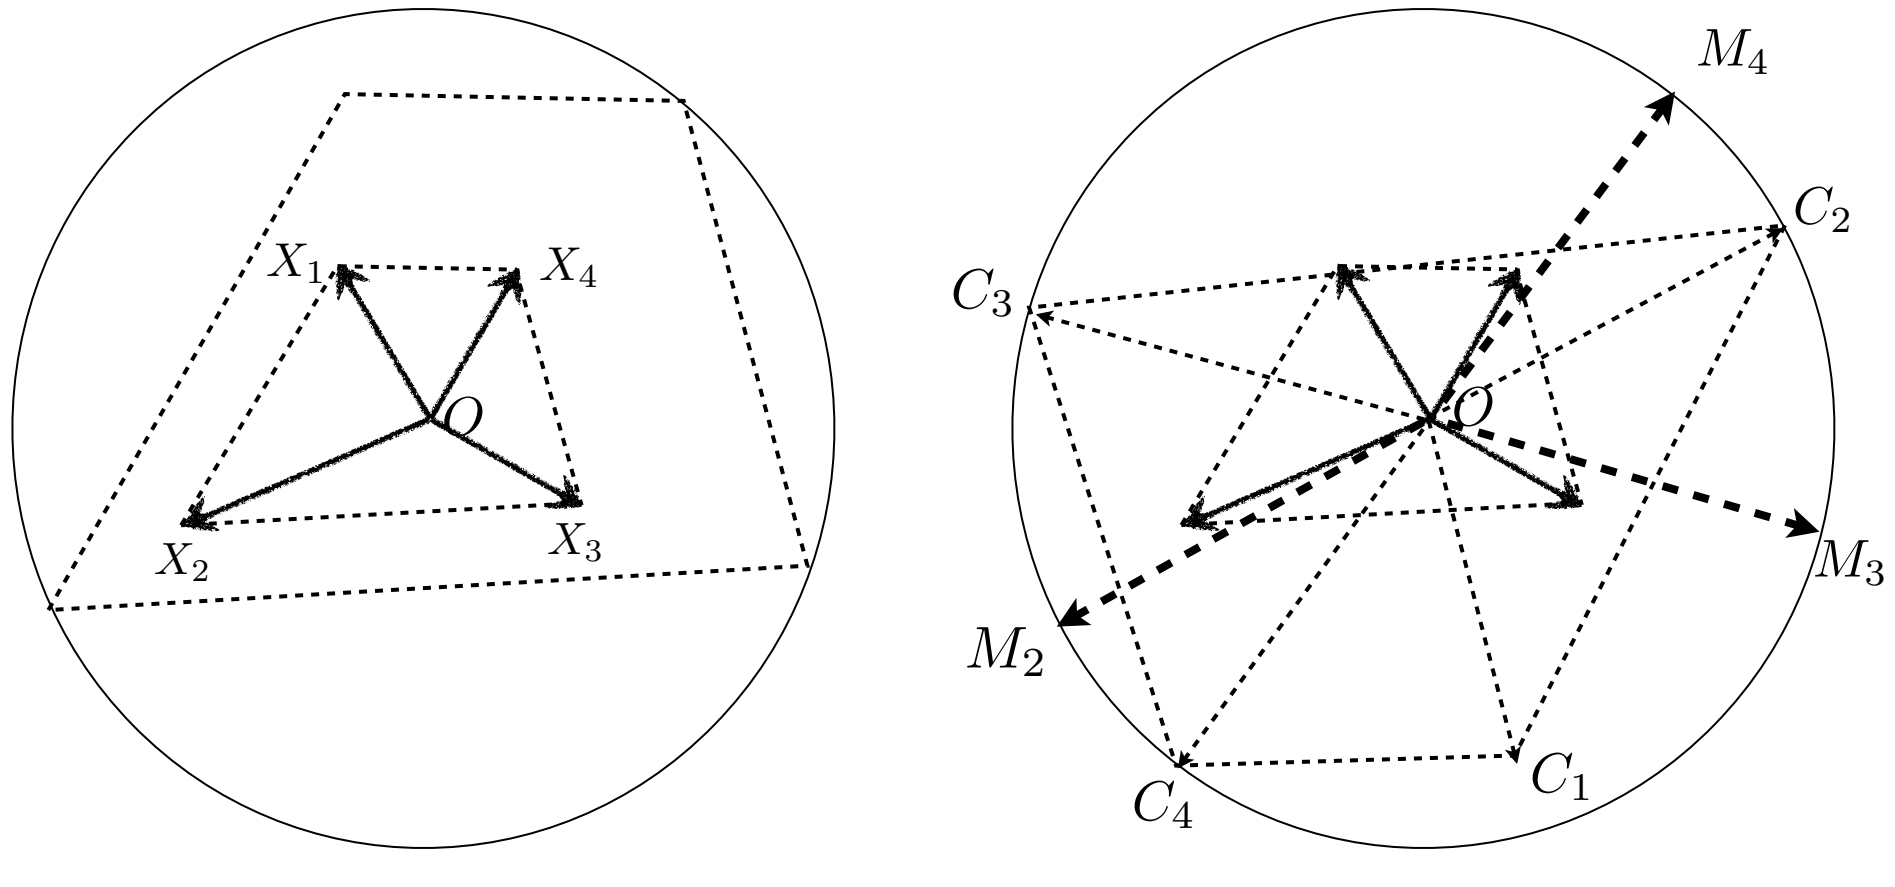

Figure 6: Arbitrary four states lying on a half-plane of the Bloch sphere are given, denoted by $\{q_{\mathrm{x}} = 1/4, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{4}$. Each state $\rho_{\mathrm{x}}/4$ corresponds to OX_{x} where $\mathrm{x} = 1, 2, 3, 4$. Applying Lemma 4.3, it is aimed to find a rectangle which is maximal in the Bloch sphere and similar to the given one $X_1X_2X_3X_4$. Then, the maximal rectangle is rotated such that the optimality condition in Eq. (23) is satisfied, which then results in $C_1C_2C_3C_4$. Thus, complementary states are found in OC_{x} for $\mathrm{x} = 1, 2, 3, 4$. Note that vertices of $C_1C_2C_3C_4$ may not lie on the surface of the Bloch sphere. For such vertices, optimal POVM elements are the null measurement. Optimal measurement follows straightforwardly as $\{M_{\mathrm{x}} \propto OM_{\mathrm{x}}\}_{\mathrm{x}=1}^{4}$.

The analysis shown in the above implies that that the guessing probability does not depend on detailed relations among given quantum states but a property assigned by the set of them. This shows the freedom of choosing four states such that the guessing capability about states does not change. More precisely, this can be seen in terms of the symmetry operator, which is in this case,

$$K = \frac{1}{4}\rho_{\mathrm{x}} + r\sigma_{\mathrm{x}} = \frac{1}{2}I \tag{36}$$

consistently to Eq. (35). That is, all sets of four states of, pairs of orthogonal states, share the same the symmetry operator in Eq. (36), meaning that all of them are in the same equivalence class, see the definition 3.1.

Remark 4.5. *Four states of any two pairs of orthogonal qubit states are in the same equivalence class, $\mathcal{A}_{I/2}$.*

4.3.2 Four-state example II: quadrilateral

Next, let us consider arbitrary four qubit states defined on a half-plane, which are given with the equal probabilities 1/4. For the generality, we do not assume any internal symmetry among given states $\{1/4, \rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{4}$ except the assumption that they are on a half-plane in the Bloch sphere. It is then straightforward to generalize this to arbitrary four states defined on any plane in the sphere.

We now refer to Fig. 6 to show how the geometric formulation in Lemma 4.3 can be applied those four states. The polytope of four states is shown as the quadrilateral $X_1X_2X_3X_4$ where each vertex corresponds to $\rho_{\mathrm{x}}/4$ for $\mathrm{x} = 1, 2, 3, 4$. Then, one has to expand the given quadrilateral such that they are maximal in the Bloch sphere. In this way, the ratio between two quadrilaterals can be found.

To find complementary states, one has to rotate the obtained maximal quadrilateral such that the optimality condition in Eq. (15) is fulfilled. The resulting quadrilateral from which complementary states can be found is then, $C_1C_2C_3C_4$, where OC_{x} for $\mathrm{x} = 1, 2, 3, 4$ are complementary states. It can happen that, since a given quadrilateral $X_1X_2X_3X_4$ is arbitrarily shaped, some vertices may not be on the surface of the Bloch sphere. As it is depicted in Fig. 6, suppose that OC_1 cannot lie at the surface of the sphere. This means that complimentary state σ_1 is not pure, and thus the POVM element for state ρ_1 corresponds to the null measurement, $M_1 = 0$. This follows from the optimality condition in Lemma 4.2 to fulfill Eq. (9). The optimal discrimination strategy for these states is thus to prepare measurement such that there are three kinds of outcomes from M_{x} with $\mathrm{x} = 2, 3, 4$. Note also that, as the convex hull of the POVM elements, $M_1M_2M_3$ contains the origin, one can also construct a complement measurement.

4.3.3 Four-state example III: tetrahedron

We now consider four qubit states $\{\rho_{\mathrm{x}}\}_{\mathrm{x}=1}^{4}$ which form a polytope having a volume in the Bloch sphere, see Fig. 7. Suppose that they are given with probability 1/4 for each, and for convenience we assume that the tetrahedron constructed by four states is covered by a sphere. Later, this can be relaxed and generalized to cases that all vertices of the tetrahedron are not touched by a sphere. Here, since the tetrahedron is covered by a sphere, four states have the same purity, which we denote by f.

Referring to Fig. 7, let us show how to find the guessing probability, complementary states and optimal measurement. The guessing probability immediately follows by applying Lemma 4.3. The ratio r can be computed by finding the ratio of two diameters of two sphere: one is the sphere covering the given tetrahedron, and the other the Bloch sphere covering a maximal tetrahedron similar to the given one. As the purity is given by f, the guessing probability is given by

$$P_{\mathrm{guess}} = \frac{1}{4} + \frac{1}{4} f,$$

which does not depend on detailed relations among given states such as angles between given states. The above holds true for any four states whose tetrahedron in the Bloch sphere can be covered by a single sphere.

Then, one rotates the maximal tetrahedron within the Bloch sphere such that the resulting one satisfies the optimality condition in Eq. (15). Since the tetrahedron already fully occupies the Bloch sphere, it is not difficult to see that the resulting tetrahedron has

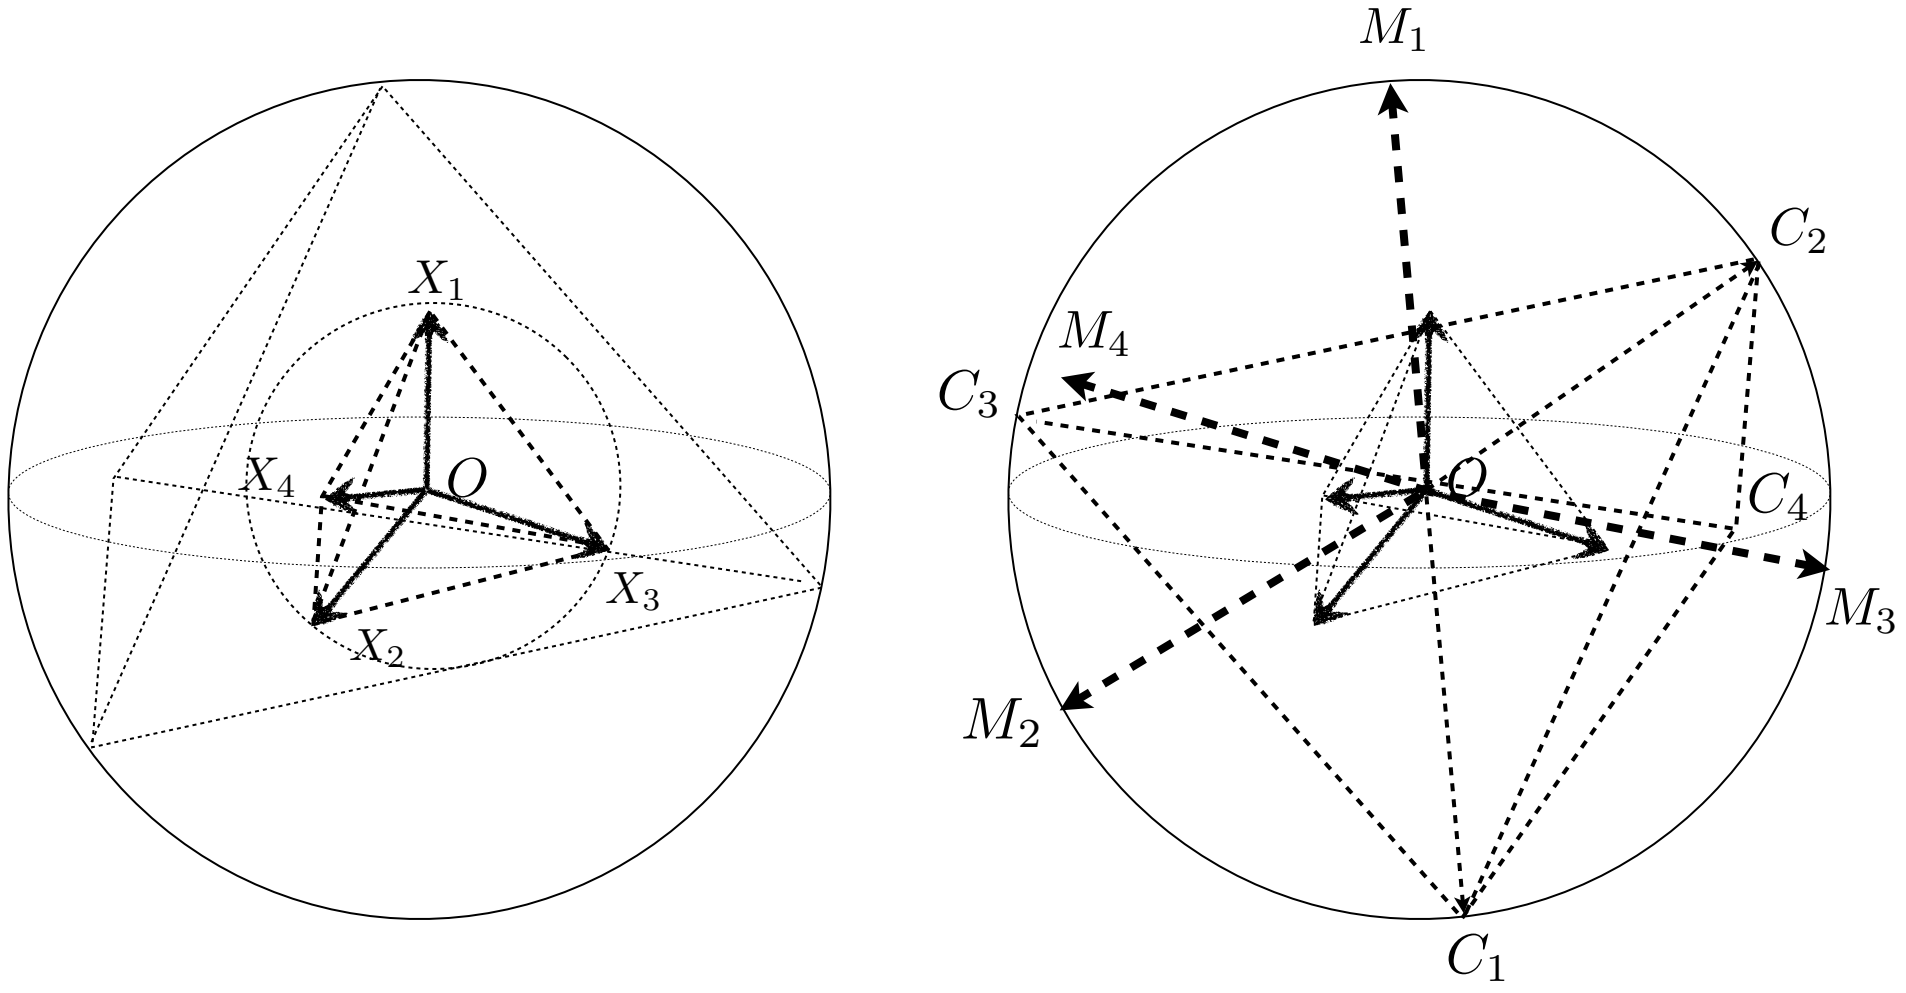

Figure 7: It is shown that four given states OX_{x} (x $= 1, 2, 3, 4$) form a tetrahedron $X_1X_2X_3X_4$ in the Bloch sphere. They are given with prior probabilities $1/4$, and it is not assumed that they are equally spaced one another in the sphere. Applying Lemma 4.3, one first expands the given tetrahedron until it is maximal in the Bloch sphere, and then rotates the maximal one such that the optimality condition in Eq. (23) is fulfilled. The resulting tetrahedron $C_1C_2C_3C_4$ defines the polytope of complementary states, from which it is clear that optimal POVM elements are $\{M_{\mathrm{x}} = OM_{\mathrm{x}}\}_{\mathrm{x}=1}^{4}$ such that $OM_{\mathrm{x}} = -OC_{\mathrm{x}}$.

the reflection symmetry to the given tetrahedron, with respect to the origin of the Bloch sphere, see Fig. (7). Each vertex OC_{x} for x $= 1, 2, 3, 4$ corresponds to complementary states, and optimal POVM elements are found to be those rank-one operators orthogonal to complementary states

4.4 Etc.

So far, we have considered discrimination of two, three, and four qubit states. In this way, for any number of qubit states given, one can apply the geometric formulation and then find the guessing probability, complementary states, and optimal measurement. The framework can be summarized as follows. The first to do is to construct a polytope of given states, and then one has to search for the polytope of complementary states such that the optimality condition in Eq. (15), or equivalently Eq. (8), is fulfilled. Two resulting polytopes must be congruent, and correspondingly labeled lines from respective polytopes are anti-parallel. For cases when measurement is applied, its POVM element is of rank-one and also corresponding complementary states must be of rank-one, that is, pure states. If it is found that complementary states are not of rank-one, then their POVM elements are the null operator and thus the optimal strategy for those states is to apply no-measurement. *For the implementation in experiment, this means that no output port is needed for those* *states.*

As we have also shown, there is a further simplification in optimal discrimination when the polytope of quantum states given with equal prior probabilities is tightly covered by a sphere, such that all vertices of the polytope touch the sphere. Then, the guessing probability simply follows from the ratio between diameters of two spheres, one from the sphere covering a given polytope and the other the Bloch sphere. In this case, it is explicitly shown that the guessing probability does not depend on detailed relations of given states such as angles between any two given states.

Remark 4.6. *For N qubit states given with equal prior probabilities $1/N$, if their polytope in the Bloch sphere is covered by a smaller sphere of radius r such that each vertex touches the sphere and contains the origin of the Bloch sphere, the guessing probability for those states is given by $P_{\mathrm{guess}} = 1/N + r$ independently to detailed relations among given states.*

For high-dimensional quantum systems, a general geometric expression is lacked and therefore the geometric formation shown in the subsection 2.3 cannot be further applied in general. Once given states give an underlying geometry in which the convex polytope picture is clear, one can apply and formalize the method of the geometric formulation.

5 Toward geometry of high-dimensional quantum states

So far, it has been shown how the formulation based on the geometry of quantum states can be applied to deriving optimal discrimination, in particular, the guessing probability. In this section, we argue that, conversely, the guessing probability can be applied when finding the underlying geometry of high-dimensional quantum states. Let us first recall the simplified expression for the guessing probability, shown in Eq. (24) which works in any dimension, as follows: the guessing probability for any set of quantum states given with the equal prior probabilities, must be of the form $1/N + r$ and the quantity r gives an interpretation as the ratio between two polytopes, one constructed from given states and the other of complementary states.

For convenience, suppose that a set of states $\{1/N, |\psi_{\mathrm{x}}\rangle\}_{\mathrm{x}=1}^{N}$ is given and optimal discrimination of them is known, for instance, given states are symmetric. This means that the ratio r is known. Recall the optimality condition in Eq. (8) which shows that the symmetry operator K has a support by given states, i.e. $K \in \mathrm{span}\{|\psi_{\mathrm{x}}\rangle, \mathrm{x} = 1, \cdots, N\}$. Suppose that given states are spanned by d linearly independent basis, and thus it is equivalent to d-dimensional Hilbert space, $\mathrm{span}\{|\psi_{\mathrm{x}}\rangle, \mathrm{x} = 1, \cdots, N\} = \mathcal{H}_d$. From the expression

$$K = \frac{1}{N}|\psi_{\mathrm{x}}\rangle\langle\psi_{\mathrm{x}}| + r\sigma_x$$

as $|\psi_{\mathrm{x}}\rangle$ is rank-one, σ_{x} must be at least of rank $d-1$. As r is known, one can apply the ratio to finding two similar polytopes in d-dimensional Hilbert space, $\mathcal{P}(\{\frac{1}{N}, |\psi_{\mathrm{x}}\rangle\langle\psi_{\mathrm{x}}|\}_{\mathrm{x}=1}^{N})$ and $\mathcal{P}(\{\sigma_{\mathrm{x}}\}_{\mathrm{x}=1}^{N})$. Note that pure states $\{|\psi_{\mathrm{x}}\rangle\}_{\mathrm{x}=1}^{N}$ are extremal in the state space. For instance, one can consider the d-sphere, the unit sphere in d-dimensional Hilbert space. Since $\{|\psi_{\mathrm{x}}\rangle\}$ are extremal, they lie at the surface of the sphere. Interior points of the sphere is of $d-1$

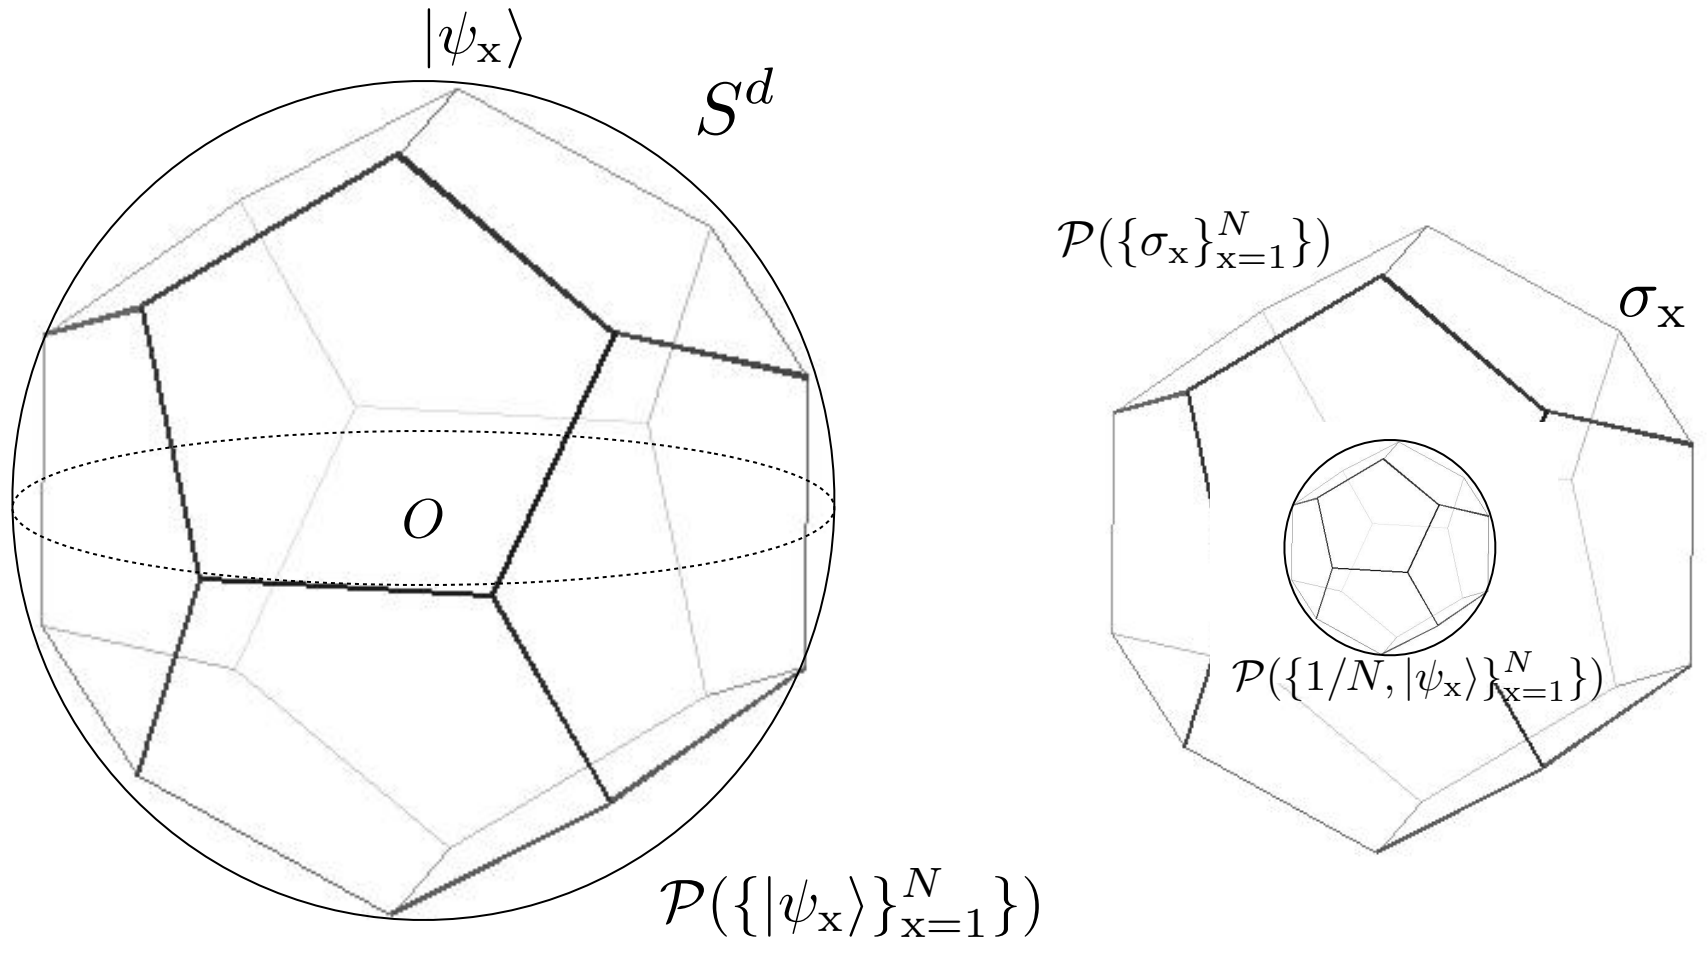
$|\psi_{\rm x}\rangle$
S^d
O
$\mathcal{P}(\{|\psi_{\rm x}\rangle\}_{\rm x=1}^N)$
$\mathcal{P}(\{\sigma_{\rm x}\}_{\rm x=1}^N)$
$\sigma_{\rm x}$
$\mathcal{P}(\{1/N, |\psi_{\rm x}\rangle\}_{\rm x=1}^N)$

Figure 8: A set of pure states $\{|\psi_{\rm x}\rangle\}_{\rm x=1}^N$ forms a polytope $\mathcal{P}(\{|\psi_{\rm x}\rangle\}_{\rm x=1}^N)$ in the d-sphere. The polytope is similar to the polytope of complementary states $\mathcal{P}(\{\sigma_{\rm x}\}_{\rm x=1}^N)$ of $d-1$ dimensional that is thus interior of the sphere. By shrinking the ball S^d uniformly such that the radius is $1/N$, one can find a polytope $\mathcal{P}(\{1/N, |\psi_{\rm x}\rangle\}_{\rm x=1}^N)$. Then, the ratio between two polytopes $\mathcal{P}(\{1/N, |\psi_{\rm x}\rangle\}_{\rm x=1}^N)$ and $\mathcal{P}(\{\sigma_{\rm x}\}_{\rm x=1}^N)$ is given by $r = P_{\rm guess} - 1/N$ from the guessing probability.

dimensional, and thus correspond to the complementary states $\{\sigma_{\rm x}\}_{\rm x=1}^N$. The ratio r shows how two polytopes are related, see Fig. 8.

6 Connection to quantum cloning

In this section, we apply results obtained in state discrimination in the previous sections, to related problems in quantum cloning. Quantum cloning can be introduced in the following context: a single copy of unknown quantum state is given and it is asked to return N copies of them. The no-cloning theorem has shown that if $N > 1$, assuming that N copies are to be returned anyway, perfect clones can never be made [50], and therefore N resulting copies must be only approximate clones. This naturally leads to an optimization problem that one has to find a best performance of cloning quantum states over all quantum operations [51] [52]. Among all possibilities, a trivial strategy is to restrict allowed quantum operations into measurement: in this case, for given quantum states, measurement is optimized to make best guesses about them, according to which one prepares N best-guessed states and return them back. This is certainly not the optimal operation that performs quantum cloning.

In a general view, when unknown quantum states from a set of finite states are given, copies that approximate those given states can be returned by both operations, quantum cloning or quantum state discrimination, where the former applies general quantum operations and the latter measurement-based strategies. The qualitative difference between them can be found in the fact that, a procedure of quantum cloning itself does not have to allow one to learn about given states, and by quantum state discrimination it happens that one learns about given states. This is because, clearly, quantum state discrimination is a measurement-based strategy (thus, detection events are already there) and quantum cloning is, in principle, a process on the level of quantum states, that is, before measurement happens.

In what follows, we mainly discuss the relation between quantum cloning and state discrimination, in the aspect that quantum state discrimination is an optimal state-dependent quantum cloning in the asymptotic limit [25].

State discrimination as the $1 \to \infty$ optimal state-dependent cloning

To be explicit, let us suppose a set of pure states $\{q_{\mathrm{x}}, |\psi_{\mathrm{x}}\rangle\langle\psi_{\mathrm{x}}|\}_{\mathrm{x}=1}^{L}$, and one of states in the set is given. An optimal symmetric cloning machine is applied to produce N clones, which means that N resulting states, denoted by $\rho_{\mathrm{x}}^{(\times N)}$ for some x, are symmetric such that individual clones denoted by $\rho_{\mathrm{x}}^{(1)}$ are identical. Performance of a cloning operation can be quantified by the fidelity of individual clones, called the local cloning fidelity, as follows

$$F(1 \to N) = \sum_{\mathrm{x}=1}^{L} q_{\mathrm{x}} \langle \psi_{\mathrm{x}} | \rho_{\mathrm{x}}^{(1)} | \psi_{\mathrm{x}} \rangle. \tag{37}$$

A precise formula of the cloning fidelity is generally lacked, and has been shown for some cases, see reviews in Refs. [51] [52]. For all cases where the cloning fidelity is known, it turns out that in the asymptotic limit $N \to \infty$ the optimal cloning corresponds to a measurement-based strategy such as quantum state estimation or discrimination. As N tends to be large, the cloning fidelity decreases in general.

Apart from deriving the precise expression of cloning fidelities, it has been shown that optimal quantum cloning in the asymptotic limit must necessarily be a measurement-based strategy, i.e. measure-and-prepare scheme [25]. This means that, in the asymptotic limit, any strategies of optimal quantum cloning which achieves highest local cloning fidelities must converge to quantum state estimation or quantum state discrimination. For instance, universal or phase-covariant quantum cloning operations in the asymptotic limit would be quantum state estimation or phase estimation, respectively. Quantum cloning of a finite number of states has to necessarily be optimal state discrimination in the asymptotic limit: consequently, in this case, the cloning fidelity $F(1 \to \infty)$ is equal to the guessing probability in Eq. (1). To summarize, as N becomes large, the cloning fidelity decreases and it does until optimized measurement-based strategies give the optimal cloning fidelity. In Refs. [53] and [54], it is shown that the rate of the decrease is generally in the order $O(1/N)$ due to its direct connection to the permutational invariance, i.e., represented by quantum de Finetti theorem [55] [56] [57].

Along the line, it is still desirable to have a precise formula of the local cloning fidelity, as their behavior may pave a way to describe how information expressed by quantum states cannot be distinguished at some stages (such as in a many-particle regime $N \to \infty$) from a

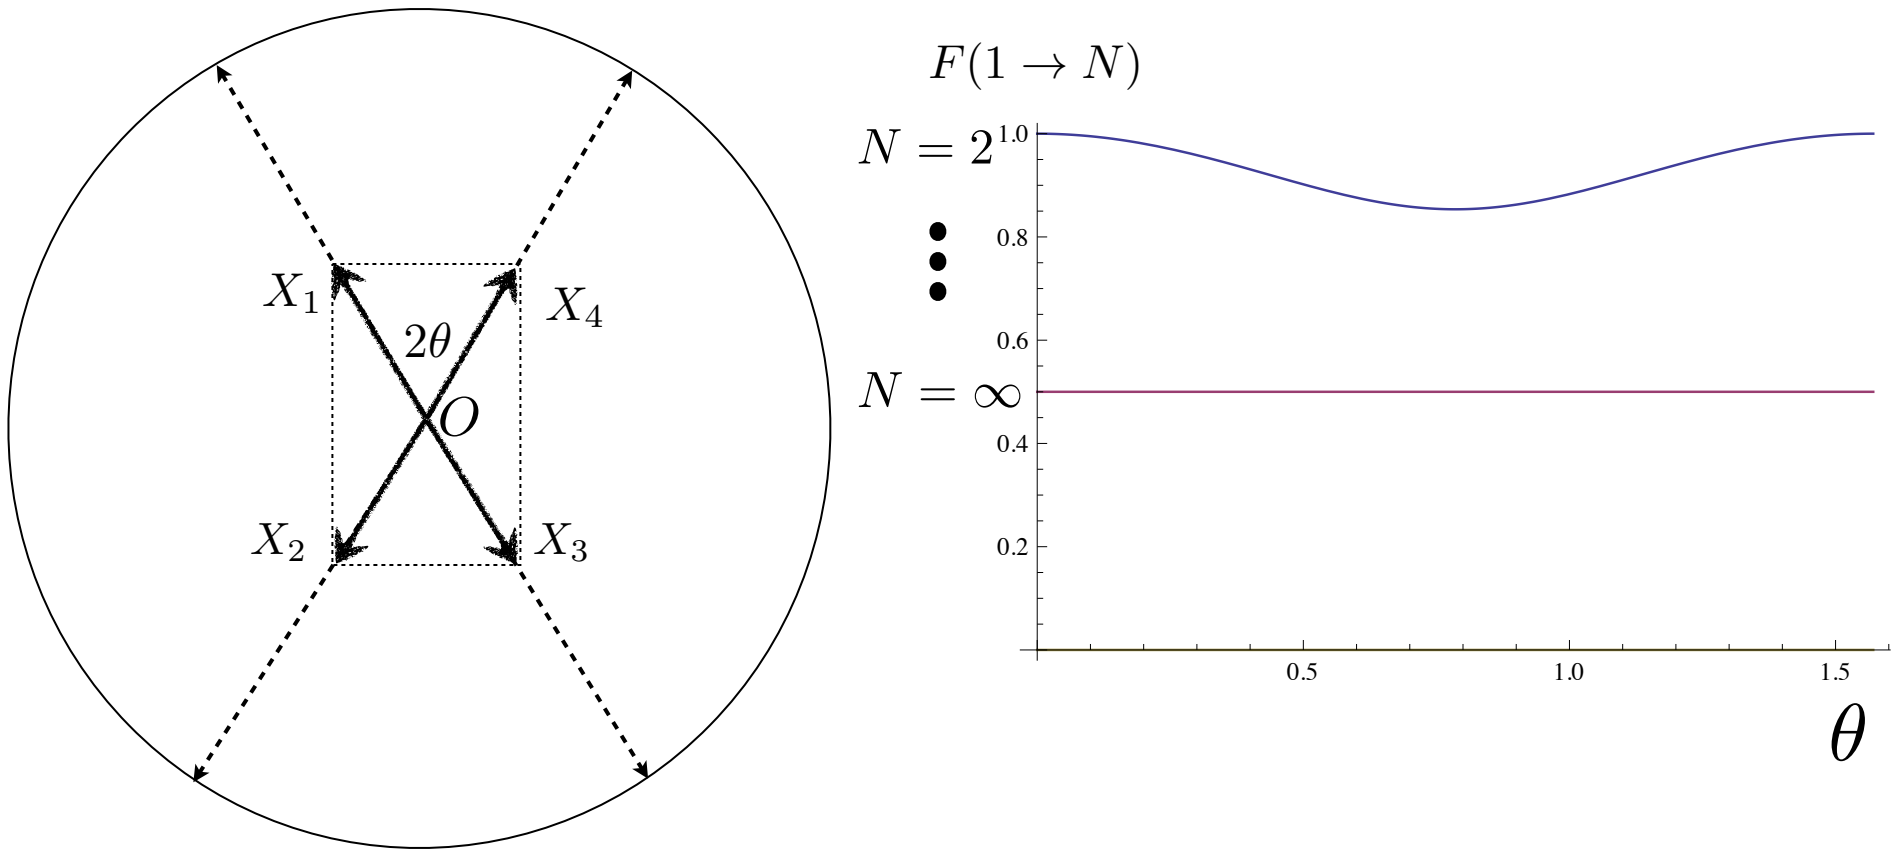

Figure 9: Pairs of two orthogonal states are given with equal prior probabilities 1/4, see four states in Eq. (33). The angle 2θ between two non-orthogonal states OX_1 and OX_4 characterizes relations among four states. The explicit formula of the cloning fidelity is shown for $1 \to 2$ symmetric cloning [59], see also Eq. (38), while it is lacked for $1 \to N$ with $N > 2$. In the asymptotic limit as N tends to be very large, the convergence is equal to optimal state discrimination, where it is shown that the dependence on the angle θ, or equivalently the relation among given states, is completely washed away. This shows a sharp difference in distribution of quantum states, between before and after measurement on quantum states. See the text for more detailed argument.

knowledge that can be expressed by measurement outcomes (detection events). Note that, as long as optimal quantum cloning produces a finite number of copies, cloning fidelities in two cases i) optimal quantum cloning and ii) measurement-based cloning strategies are not equal and thus, the two cases can be distinguished in terms of the local cloning fidelity. In contrast, in the asymptotic limit, quantum cloning has to necessarily be a measurement-based strategy which can generally be described by POVMs [25] [1].

Equivalence classes of asymptotic quantum cloning in non-asymptotics

Let us now consider a particular, and illuminating, example: state-dependent quantum cloning of two pairs of orthogonal qubit states. Recall four states in Eq. (33) in the subsection 4.3, where the angle between two non-orthogonal states is denoted by θ. For these states, the cloning fidelity in the $1 \to 2$ symmetric cloning has been shown in Ref.

---

[1] Quantum operations are entanglement-breaking if and only if they are measurement-based [58]. These operations can be therefore implemented by general measurement using POVMs, or equivalently, in the so-called Stinespring dilation representation where an operation is performed by projective measurement on ancillas after unitary evolution over systems and ancillas.

[59] as follows,

$$F(1 \to 2) = \frac{1}{2}(1 + \sqrt{\sin^4\theta + \cos^4\theta}), \tag{38}$$

which is also shown in Fig. (9). This explicitly shows that relations among given states, i.e. the relations defined by the angle, play a role in cloning of quantum states. We note that the cloning fidelity varies according to the angle and has the lowest value at $\theta = \pi/4$. Intuitively, this can be understood that distant states can be more difficult to clone than closer ones. For cases when more than 2 clones are asked to return, the precise formula of the cloning fidelity is lacked.

In Ref. [53], it is shown that for any $k \to N$ symmetric cloning, the cloning fidelity decreases in the order $O(k/N)$. From the result in Ref. [25], it is clear that in the asymptotic limit $N \to \infty$ the cloning fidelity corresponds to the guessing probability, see also Fig. 5. As it is noted in Remark 4.5, it holds that the guessing probability is independent to the relations among given quantum states and is equal to $1/2$ for any two pairs of two orthogonal states. Although the convergence may be smooth [54], the dependence of cloning performance on the angle i.e. relations of quantum states, is completely washed away only in the asymptotic limit $N \to \infty$. This shows that, qualitatively, there exists a sharp difference between asymptotic and non-asymptotic cases. We here conclude that the dependence on relations among quantum states may play a role while they are manipulated before measurement, but may no longer do when the manipulation is based on, or equivalent to, a measurement-based strategy.

7 Conclusion

In this work, we have considered the problem of minimum-error state discrimination in the approach of complementarity problem that directly analyzes optimality conditions. The main idea of the present work is to exploit general structures existing in the minimum-error discrimination via the complementarity problem. In this way, the existence of a single positive operator, the symmetry operator, is found and identified as the complete characterization of optimal discrimination such as optimal measurement and the guessing probability. Furthermore, the symmetry operator allows one to have an interpretation to the guessing probability, as the averaged distance of given states being deviated from the symmetry operator in terms of the trace norm. This is in accordance to cases when classical systems are employed, where the guessing probability is interpreted as the deviation from the uniform distribution.

Symmetry operators are then exploited to define equivalence classes among sets of quantum states, such that for those sets in the same class, the minimum-error discrimination is completely characterized by the same symmetry operator. This provides an alternative approach to minimum-error discrimination: by checking whether given two sets are in the same class, one can find optimal discrimination. In the other way around, we have shown, given a symmetry operator, how one can construct a problem of minimum-error state discrimination.

From general structures found from the optimality conditions, we have provided a geometric formulation of minimum-error state discrimination, while optimization processing over measurement is not directly referred. This can be applied once the underlying geometry of given states is clear. Conversely, we have also argued that, from cases where optimal discrimination is known, the guessing probability is useful to find the underlying geometry of high-dimensional quantum states. We have then applied the geometric formulation to qubit states and solve minimum-error discrimination: i) the complete solution is provided for any set of qubit states when prior probabilities are equal, ii) this gives an upper bound to cases when prior probabilities are not equal, iii) solutions are obtained even if given states do not contain any symmetry among them, iv) it is shown that the guessing probability does not depend on detailed relations among given states but a geometric property assigned by the set itself.

Finally, we have shown results related to minimum-error state discrimination. It is shown that the guessing probability is proportional to steerability of quantum states while ensemble steering is performed with shared entanglement. We have also shown that there may exist a sharp separation between non-asymptotic and asymptotic quantum cloning: relations among quantum states play a role in state-broadcasting while measurement is not applied (so that no information about states is leaked out), but may no longer do when quantum states are broadcasted over infinitely many parties. This is illustrated by an example of four states.

Discrimination of quantum states poses a simple question connected to fundamentals and profound imitations in various contexts of quantum information theory. For quantum information applications, clearly this is a practical problem since measurement is the only way to learn about given quantum systems in terms of classical bits. The results presented here not only provide a useful method of solving optimal discrimination for unanswered cases, but also give a general, unique, and fresh understanding to minimum-error quantum state discrimination.

Acknowledgement

The author thanks J. Bergou, B.-G. Englert, T. Fritz, D. Gross, W.-Y. Hwang, L.-C. Kwek, A. Monras, M. Navascués, H. K. Ng, P. Raynal, S. Yun, S. Wehner, and A. Winter, H. Zhu for helpful discussions and comments while preparing the manuscript. This work is supported by National Research Foundation and Ministry of Education, Singapore.

References

[1] A. S. Holevo, Probl. Inf. Transf. **10**, 317 (1974).

[2] H. P. Yuen, R. S. Kennedy, and M. Lax, IEEE Trans. Inf. Theory **21**, 125 (1975).

[3] C. Helstrom, Quantum Detection and Estimation Theory Academic, New York, ADDRESS, (1976).

[4] M. Sasaki, S. M. Barnett, R. Jozsa, M. Osaki and O. Hirota: Phys. Rev. A **59**, 3325 (1999).

[5] D. Ivanovic, Phys. Lett. A **123**, 257 (1987).

[6] D. Dieks, Phys. Lett. A **126**, 303 (1988).

[7] A. Peres, Phys. Lett. A **128**, 19 (1988).

[8] G. Jaeger and A. Shimony, Phys. Lett. A **197**, 83 (1995).

[9] M. Ban, Phys. Lett. A **213**, 235 (1996).

[10] S. Croke, E. Andersson, S. M. Barnett, C. R. Gilson, J. Jeffers, Phys. Rev. Lett. **96**, 070401 (2006).

[11] E. Bagan, R. Munoz-Tapia, G. A. Olivares-Renteria, J. A. Bergou, arXiv:1206.4145.

[12] U. Herzog, arXiv:1206.4412.

[13] A. Chefles, Contemporary Physics **41**, 401 (2000).

[14] J. A. Bergou, U. Herzog, and M. Hillery, Lect. Notes Phys. 649, 417-465 (Springer, Berlin, 2004).

[15] J. A. Bergou, J. Phys: Conf. Ser. **84**, 012001 (2007).

[16] S. M. Barnett and S. Croke, Adv. Opt. Photon. **1**, 238278 (2009).

[17] J. A. Bergou, Journal of Modern Optics, Vol. **57**, Issue 3, 160-180 (2010).

[18] K. M. R. Audenaert, *et al.* Phys. Rev. Lett. **98**, 160501 (2007).

[19] K. M. R. Audenaert, M. Nussbaum, A. Szkola, and F. Verstraete, Comm. Math. Phys. **279**, 251-283 (2008).

[20] M. Nussbaum and A. Szkola, Annals of Statistics, Vol. 37, No. 2, 1040-1057 (2009).

[21] M. Nussbaum and A. Szkola, Annals of Statistics, Vol. 39, No. 6, 3211-3233 (2011).

[22] D. Bruss, A. Ekert and C. Macchiavello, Phys. Rev. Lett. **81**, 2598 (1998).

[23] M. Keyl and R. F. Werner, J. Math. Phys. **40**, 3283 (1999).

[24] D. Bruss, M. Cinchetti, G. M. DAriano, and C. Macchiavello, Phys. Rev. A **62**, 12302 (2000).

[25] J. Bae and A. Acińn, Phys. Rev. Lett. **97**, 030402 (2006).

[26] W.-Y. Hwang, Phys. Rev. A **71**, 062315 (2005).

[27] J. Bae *et al.* Phys. Rev. A 78, 022335 (2008).

[28] J. Bae, W.-Y. Hwang, and Y.-D. Han, Phys. Rev. Lett. **107**, 170403 (2011).

[29] N. Gisin, Phys. Lett. A **242**, 1 (1998).

[30] M. Keyl, Problem 22 of the list http://www.imaph.tu-bs.de/qi/problems/.

[31] A. Chefles and S. M. Barnett, Phys. Lett. A **250**, 223229 (1998).

[32] Y. C. Eldar and G. D. Forney, IEEE Trans. Inf. Theory **47**, 3 (2001).

[33] S. M. Barnett, Phys. Rev. A **64**, 030303 (2001).

[34] J. Mizuno, M. Fujiwara, M. Akiba, T. Kawanishi, S. M. Barnett and M. Sasaki, Phys. Rev. A **65**, 012315 (2001).

[35] E. Andersson, S. M. Barnett, C. R. Gilson and K. Hunter, Phys. Rev. A **65**, 052308 (2002).

[36] Y. C. Eldar, IEEE Trans. Inf. Theory **49**, 446456 (2003).

[37] C.-L. Chou, Phys. Rev. A **70**, 062316 (2004).

[38] M. Jezek, J. Rehacek, and J. Fiurasek, Phys. Rev. A **65**, 060301(R) (2002).

[39] Y. C. Eldar, A. Megretski, and G. C. Verghese, IEEE Trans. Inf. Theory **50**, 1198 (2004).

[40] S. Boyd and L. Vandenberghe, Convex Optimization, Cambridge University Press, (2004).

[41] K. G. Murty, Linear complementarity, linear and nonlinear programming, Heldermann Verlag (1998).

[42] S. Dziembowski and U. Maurer, Journal of Cryptology, vol. 17, no. 1, pp. 526 (2004).

[43] J. Bae and W.-Y. Hwang, arXiv:1204.2313.

[44] E. Schrödinger, Proc. Camb. Phil. Soc. **31**, 553 (1935), *ibid.* **32**, 446, (1936).

[45] N. Gisin, Helv. Phys. Acta **62**, 363 (1989).

[46] L. P. Hughston, R. Jozsa, and W. K. Wootters, Phys. Lett. A **183**, 14 (1993).

[47] Y. C. Eldar, Phys. Rev. A **68**, 052303 (2003).

[48] M. E. Deconinck and B.M. Terhal, Phys. Rev. A **81**, 062304 (2010).

[49] K. Hunter, Phys. Rev. A **68**, 012306 (2003).

[50] W. K. Wootters and W. H. Zurek, Nature **299**, 802 (1982).

[51] V. Scarani, S. Iblisdir, N. Gisin, and A. Acín, Rev. Mod. Phys. **77**, 1225-1256 (2005).

[52] N. J. Cerf and J. Fiurasek, Progress in Optics, vol. 49, p. 455, Edt. E. Wolf (Elsevier, 2006).

[53] G. Chiribella and G. M. D'Ariano, Phys. Rev. Lett. **97**, 250503 (2006).

[54] G. Chiribella, Theory of Quantum Computation, Communication, and Cryptography, Lecture Notes in Computer Science, Vol. 6519/2011, 9-25 (2011).

[55] M. Christandl, R. Koenig, G. Mitchison, and R. Renner, Comm. Math. Phys. **273**, 473 (2007).

[56] R. Renner, Nature Physics **3**, 645 (2007).

[57] R. Koenig and G. Mitchison, J. Math. Phys. **50**, 012105 (2009).

[58] M. Horodecki, P. W. Shor, M. B. Ruskai, Rev. Math. Phys. **15**, 629–641 (2003).

[59] D. Bruss and C. Macchiavello, J. Phys. A: Math. Gen. **34**, 6815 (2001).